

ICOM

INSTRUCTION MANUAL

VHF TRANSCEIVER

IC-2200H



Icom Inc.



---

## FOREWORD

---

Thank you for purchasing this Icom product. The IC-2200H VHF TRANSCEIVER is designed and built with Icom's superior technology and craftsmanship. With proper care, this product should provide you with years of trouble-free operation.

We want to take a couple of moments of your time to thank you for making your IC-2200H your radio of choice, and hope you agree with Icom's philosophy of "technology first." Many hours of research and development went into the design of your IC-2200H.

### ◆ FEATURES

- 65 W\* — *high transmit output power* (except Korea/Taiwan versions)
- *Tone squelch, DTCS squelch standard*
- *Dual color (amber & green) LCD backlight*
- *Remote control microphone available* (optional for some versions)
- *Optional Digital modulator/demodulator*
- *Optional DTMF decoder*

---

## IMPORTANT

---

**READ ALL INSTRUCTIONS** carefully and completely before using the transceiver.

**SAVE THIS INSTRUCTION MANUAL**— This instruction manual contains important operating instructions for the IC-2200H.

---

## EXPLICIT DEFINITIONS

---

WORD	DEFINITION
⚠ <b>WARNING!</b>	Personal injury, fire hazard or electric shock may occur.
<b>CAUTION</b>	Equipment damage may occur.
<b>NOTE</b>	Recommended for optimum use. No risk of personal injury, fire or electric shock.

Icom, Icom Inc. and the ICOM logo are registered trademarks of Icom Incorporated (Japan) in the United States, the United Kingdom, Germany, France, Spain, Russia and/or other countries.

---

## PRECAUTION

---

**⚠ WARNING RF EXPOSURE!** This device emits Radio Frequency (RF) energy. Extreme caution should be observed when operating this device. If you have any questions regarding RF exposure and safety standards please refer to the Federal Communications Commission Office of Engineering and Technology's report on Evaluating Compliance with FCC Guidelines for Human Radio frequency Electromagnetic Fields (OET Bulletin 65)

**⚠ WARNING! NEVER** connect the transceiver to an AC outlet. This may pose a fire hazard or result in an electric shock.

**⚠ WARNING! NEVER** operate the transceiver while driving a vehicle. Safe driving requires your full attention—anything less may result in an accident.

**NEVER** connect the transceiver to a power source of more than 16 V DC. This will ruin the transceiver.

**NEVER** connect the transceiver to a power source using reverse polarity. This will ruin the transceiver.

**NEVER** cut the DC power cable between the DC plug and fuse holder. If an incorrect connection is made after cutting, the transceiver may be damaged.

**NEVER** expose the transceiver to rain, snow or any liquids. The transceiver may be damaged.

**NEVER** operate or touch the transceiver with wet hands. This may result in an electric shock or ruin the transceiver.

**NEVER** place the transceiver where normal operation of the vehicle may be hindered or where it could cause bodily injury.

**DO NOT** push the PTT when not actually desiring to transmit.

**DO NOT** allow children to play with any radio equipment containing a transmitter.

During mobile operation, **DO NOT** operate the transceiver without running the vehicle's engine. When the transceiver's power is ON and your vehicle's engine is OFF, the vehicle's battery will soon become exhausted.

**BE CAREFUL!** The transceiver will become hot when operating it continuously for long periods.

**AVOID** placing the transceiver against walls or putting anything on the top of the transceiver. This will obstruct heat dissipation.

**AVOID** using or placing the transceiver in direct sunlight or in areas with temperatures below  $-10^{\circ}\text{C}$  ( $+14^{\circ}\text{F}$ ) or above  $+60^{\circ}\text{C}$  ( $+140^{\circ}\text{F}$ ).

**AVOID** the use of chemical agents such as benzine or alcohol when cleaning, as they can damage the transceiver's surfaces.

**USE** Icom microphones only (supplied or optional). Other manufacturer's microphones have different pin assignments and may damage the transceiver if attached.

# SUPPLIED ACCESSORIES AND OPTIONS

## ■ Supplied Accessories


- ① Microphone (HM-133V)\* . . . . . 1
- ② Fuse (20 A) . . . . . 1
- ③ DC power cable (3 m) . . . . . 1
- ④ Mobile mounting bracket . . . . . 1
- ⑤ Mounting screws, nuts and washers . . . . . 1 set
- ⑥ Microphone hanger† . . . . . 1
- ⑦ Insulation sheet‡ . . . . . 1

\*HM-118TN DTMF MICROPHONE supplied versions are also available.

Some versions are not supplied with a hand microphone.

†Depending on version.

‡Used for optional unit installation, see p.91 for details.

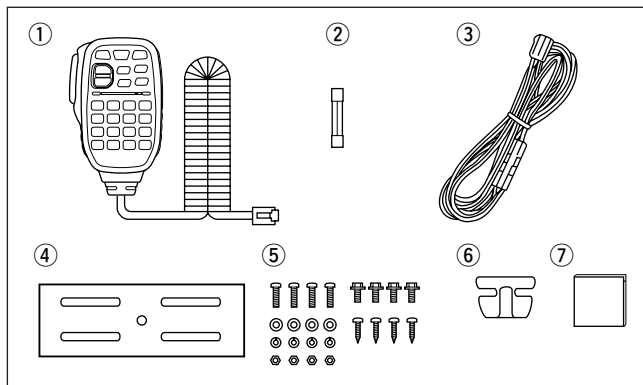

## ■ Options

**UT-108** DTMF DECODER UNIT

**UT-118** DIGITAL UNIT

**HM-118TAN/TN** DTMF MICROPHONES

**HM-118N** HAND MICROPHONE

**HM-133V** REMOTE-CONTROL MICROPHONE

**SP-10** EXTERNAL SPEAKER

**OPC-440/OPC-647** MIC EXTENSION CABLES

**OPC-441** SPEAKER EXTENSION CABLE

**OPC-1132/OPC-347** DC POWER CABLES

**OPC-589** ADAPTER CABLE

**CS-2200H** CLONING SOFTWARE

+ **OPC-478/OPC-478U** CLONING CABLE

**OPC-474** CLONING CABLE

---

# TABLE OF CONTENTS

---

FOREWORD .....	i
IMPORTANT .....	i
EXPLICIT DEFINITIONS .....	i
PRECAUTION .....	ii
SUPPLIED ACCESSORIES AND OPTIONS .....	iii
TABLE OF CONTENTS .....	iv
<b>QUICK REFERENCE GUIDE .....</b>	<b>I–VI</b>
■ Installation .....	I
■ Your first contact .....	IV
■ Repeater operation .....	V
■ Programming memory .....	VI
<b>1 PANEL DESCRIPTION .....</b>	<b>1–8</b>
■ Front panel .....	1
■ Function display .....	3
■ Rear panel .....	5
■ Microphone (HM-133V) .....	6
■ Microphone keypad .....	7
<b>2 SETTING A FREQUENCY .....</b>	<b>9–12</b>
■ Preparation .....	9
■ Using the tuning dial .....	9
■ Using the keypad .....	10
■ Using the [▲]/[▼] keys .....	10
■ Tuning step selection .....	11
■ Lock functions .....	12
<b>3 BASIC OPERATION .....</b>	<b>13–16</b>
■ Receiving .....	13
■ Monitor function .....	13
■ Audio mute function .....	14
■ Squelch attenuator .....	14
■ S-meter squelch .....	15
■ Transmitting .....	15
■ Selecting output power .....	16
■ One-touch PTT function .....	16
<b>4 REPEATER OPERATION .....</b>	<b>17–23</b>
■ Accessing a repeater .....	17
■ Subaudible tones .....	19
■ Offset frequency .....	21
■ Repeater lockout .....	21
■ Reversed duplex mode .....	22
■ Auto repeater .....	23
<b>5 MEMORY OPERATION .....</b>	<b>24–34</b>
■ General description .....	24
■ Memory channel selection .....	24
■ Programming a memory channel .....	25
■ Transferring memory contents .....	27
■ Programming channel names .....	29
■ Memory clearing .....	31
■ Memory bank selection .....	32
■ Memory bank setting .....	33
■ Transferring bank contents .....	34
<b>6 CALL CHANNEL OPERATION .....</b>	<b>35–36</b>
■ Call channel selection .....	35
■ Call channel transferring .....	35
■ Programming a call channel .....	36
<b>7 SCAN OPERATION .....</b>	<b>37–42</b>
■ Scan types .....	37
■ Scan start/stop .....	38
■ Scan edges programming .....	39
■ Skip channel setting .....	41
■ Scan resume condition .....	42

<b>8 PRIORITY WATCH</b> .....	<b>43–44</b>
■ Priority watch types .....	43
■ Priority watch operation .....	44
<b>9 DTMF MEMORY ENCODER</b> .....	<b>45–47</b>
■ Programming a DTMF code .....	45
■ Transmitting a DTMF code .....	46
■ DTMF speed .....	47
<b>10 POCKET BEEP AND TONE SQUELCH</b> .....	<b>48–51</b>
■ Pocket beep operation .....	48
■ Tone/DTCS squelch operation .....	50
■ Tone scan .....	51
<b>11 PAGER/CODE SQUELCH (Required Optional UT-108)</b> .....	<b>52–57</b>
■ Pager function .....	52
■ Code programming .....	52
■ Pager operation .....	55
■ Code squelch .....	57
<b>12 DIGITAL MODE OPERATION (Required Optional UT-118) ....</b>	<b>58–73</b>
■ Digital mode operation .....	58
■ Call sign programming .....	58
■ Digital voice mode operation .....	61
■ When receiving a Digital call .....	63
■ Break-in communication .....	65
■ EMG communication .....	66
■ Digital code/Call sign squelch operation .....	67
■ Slow data communication .....	68
■ Other setting items .....	69
■ GPS operation .....	72
<b>13 OTHER FUNCTIONS</b> .....	<b>74–87</b>
■ Set mode .....	74
■ Initial set mode .....	79

■ Weather channel operation .....	83
■ Microphone keys .....	84
■ Partial reset .....	85
■ All reset .....	85
■ Data cloning .....	86
<b>14 SPECIFICATIONS</b> .....	<b>88</b>
<b>15 MAINTENANCE</b> .....	<b>89–91</b>
■ Troubleshooting .....	89
■ Fuse replacement .....	90
■ Optional unit installation .....	91
<b>16 CE</b> .....	<b>92</b>
<b>17 MODE ARRANGEMENT</b> .....	<b>93–94</b>

# QUICK REFERENCE GUIDE

## ■ Installation

### ◇ Location


Select a location which can support the weight of the transceiver and does not interfere with driving in any way. We recommend the locations shown in the diagram below.

**NEVER** place the transceiver where normal operation of the vehicle may be hindered or where it could cause bodily injury.

**NEVER** place the transceiver where air bag deployment may be obstructed.


**DO NOT** place the transceiver where hot or cold air blows directly onto it.

**AVOID** placing the transceiver in direct sunlight.

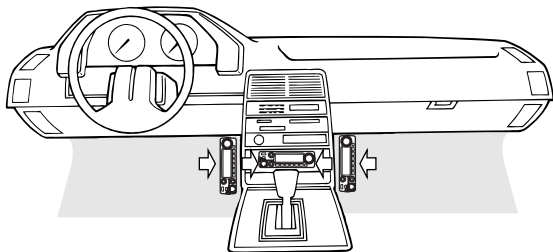

### ◇ Using the mounting bracket

- ① Drill 4 holes where the mounting bracket is to be installed.
  - Approx. 5.5–6 mm (1/4") when using nuts; approx. 2–3 mm (1/8") when using self-tapping screws.
- ② Insert the supplied screws, nuts and washers through the mounting bracket and tighten.
- ③ Adjust the angle for the clearest view of the function display.

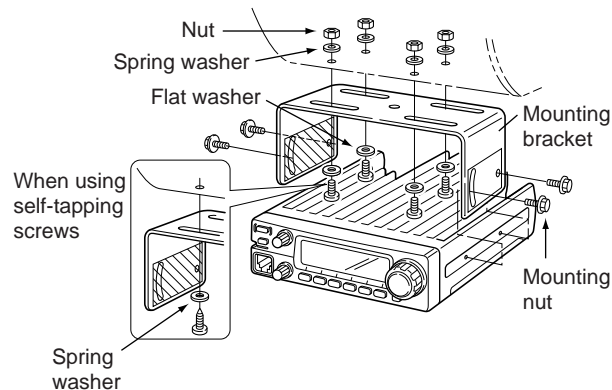

### /// IMPORTANT!

Detailed installation notes for Icom mobile transceivers to be fitted into vehicles are available. Contact your Icom dealer or distributor.




◇ **Battery connection**

- ⚠ **NEVER** connect the transceiver directly to a 24 V battery.
- ⚠ **DO NOT** use the cigarette lighter socket for power connections. (See p. 5 for details)

Attach a rubber grommet when passing the DC power cable through a metal plate to prevent short circuiting.

• **CONNECTING TO A DC POWER SOURCE**

- See p. 90 for fuse replacement.

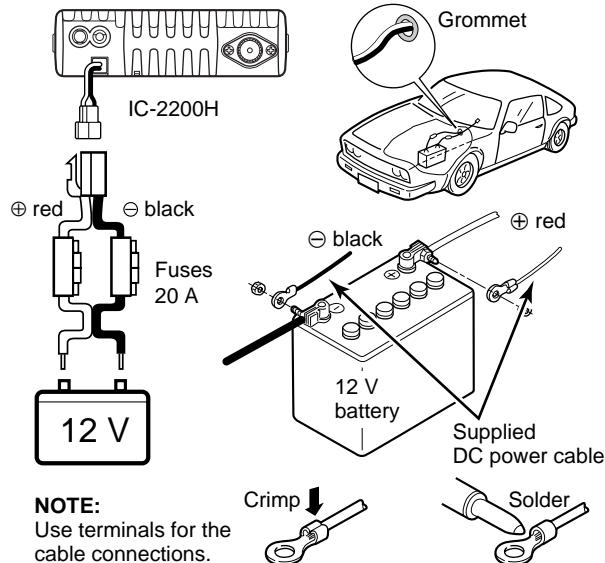


◇ **DC power supply connection**

Use a 13.8 V DC power supply with at least 15 A capacity.

Make sure the ground terminal of the DC power supply is grounded.

• **CONNECTING TO A DC POWER SUPPLY**

- See p. 90 for fuse replacement.


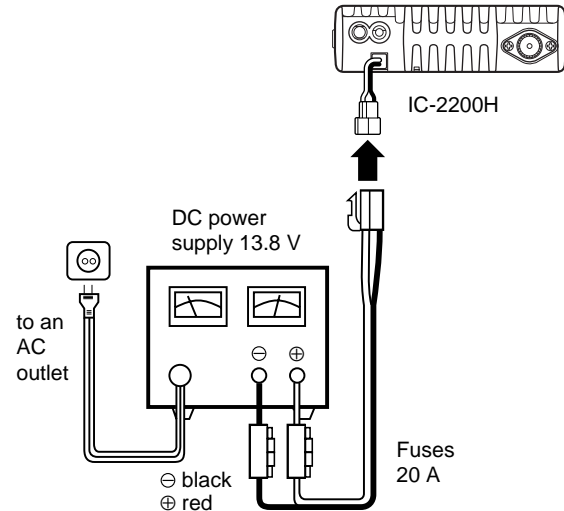


## QUICK REFERENCE GUIDE

### ◇ Antenna installation

#### • Antenna location


To obtain maximum performance from the transceiver, select a high-quality antenna and mount it in a good location. A non-radial antenna should be used when using a magnetic mount.

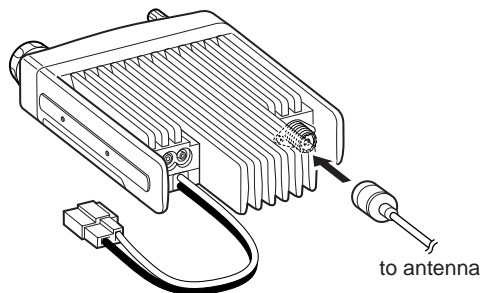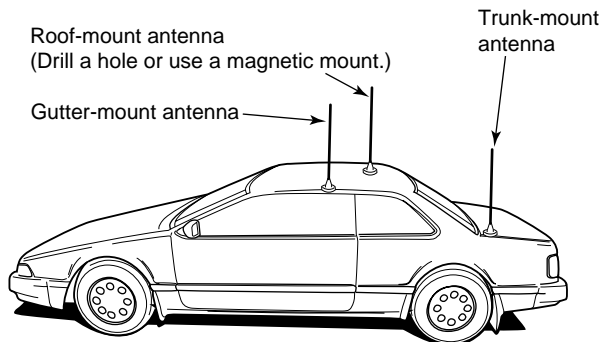

#### • Antenna connector

The antenna uses a PL-259 connector.

#### • PL-259 CONNECTOR

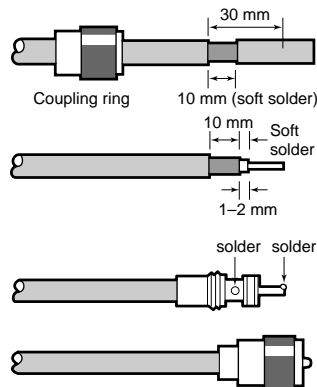

① Slide the coupling ring down. Strip the cable jacket and soft solder.

② Strip the cable as shown at left. Soft solder the center conductor.


③ Slide the connector body on and solder it.

④ Screw the coupling ring onto the connector body.  
(10 mm ≈ 3/8 in)

/// **NOTE:** There are many publications covering proper antennas and their installation. Check with your local dealer for more information and recommendations.

### ◇ Connecting a microphone

Connect a microphone to the eight-pin modular socket on the front panel of the transceiver.

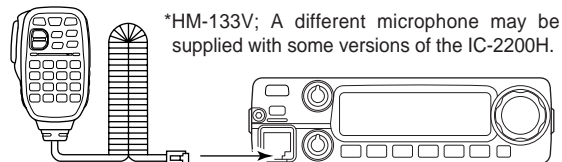


## ■ Your first contact

Now that you have your IC-2200H installed in your car or shack, you are probably excited to get on the air. We would like to take you through a few basic operation steps to make your first “On The Air” an enjoyable experience.


### 1. Turning ON the transceiver

Before powering up your IC-2200H, you may want to make sure the audio volume and squelch level controls are set in 9–10 o'clock positions.



Set both [VOL] and [SQL] controls to 9–10 o'clock positions.

Although you have purchased a brand new transceiver, some settings may be changed from the factory defaults because of the QC process. Resetting the CPU is necessary to start from factory default.

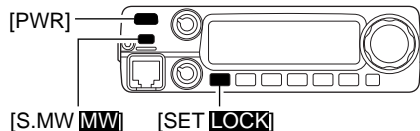

➔ While pushing [SET LOCK] and [S.MW MW], push [PWR] for 1 sec. to reset the CPU.

### 2. Tune the desired frequency


[DIAL] will allow you to dial in the frequency you want to operate. Pages 9 and 11 will instruct you on how to set the tuning speed.



#### Using the HM-133V

You can directly enter the frequency with the HM-133V keypad.

[EXAMPLE]: Setting frequency to 145.3625 MHz.

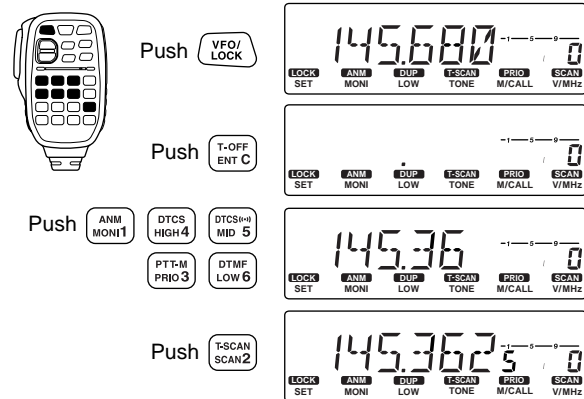

We hope these pointers have been helpful. Now you are ready to call CQ.


## QUICK REFERENCE GUIDE

### ■ Repeater operation

#### 1. Setting duplex


Push **[LOW D<sup>UP</sup>]** for 1 sec. once or twice to select minus duplex or plus duplex.

- The USA version has an auto repeater function, therefore, setting duplex is not required.

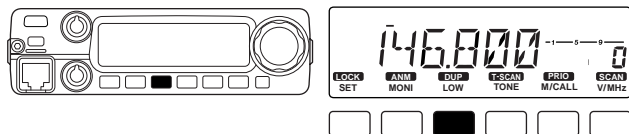

#### 2. Repeater tone


Push **[TONE T-SCAN]** several times until “♪” appears, if the repeater requires a subaudible to be accessed.

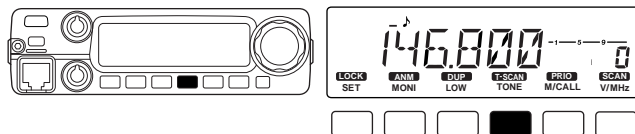

#### Using the HM-133V

Plus or minus duplex selection and the repeater tone setting can be made easily via HM-133V.

Push **[DUP- 7(TONE)]** for minus duplex; **[DUP+ 8(TSQL ((••)))]** for plus duplex selection, push **[FUNC]** then **[DUP- 7(TONE)]** to turn the repeater tone ON.

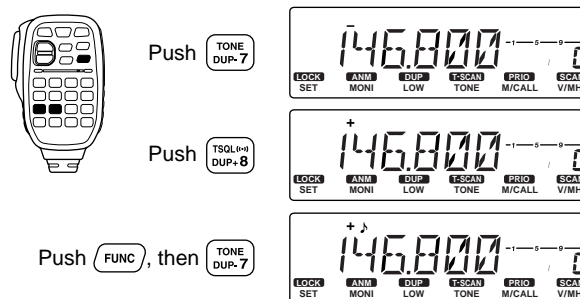

## ■ Programming memory channels

The IC-2200H has a total of 207 memory channels (including 6 scan edges and 1 call channel) for storing often used operating frequency, repeater settings, etc.


### 1. Setting a frequency

In VFO mode, set the desired operating frequency with repeater, tone and tuning steps, etc.

### 2. Selecting a memory channel

Momentarily push **[S.MW MW]**, then rotate **[DIAL]** to select the desired memory channel.

- “M” indicator and memory channel number blink.

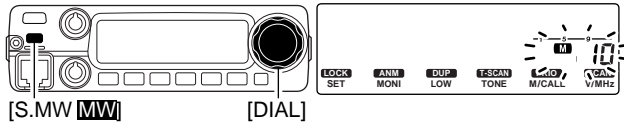


### 3. Writing a memory channel

Push and hold **[S.MW MW]** for 1 sec. to program.

- 3 beeps sound
- Memory channel number automatically increases when continuing to push **[S.MW MW]** after programming.

### Using the HM-133V

- ① In VFO mode, set the desired operating frequency, including offset direction, tone settings, etc.
- ② Push **[FUNC]** then **[CLR A(MW)]**.
  - “M” indicator and memory channel number blink.

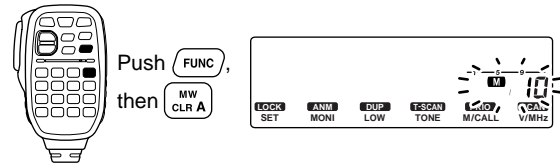


- ③ Push **[▲]/[▼]** to select the desired memory channel.
- ④ Push **[FUNC]** then push **[CLR A(MW)]** for 1 sec. to program.
  - 3 beeps sound
  - Memory channel number automatically increases when continuing to push **[CLR A(MW)]** after programming.

# 1

## PANEL DESCRIPTION

### ■ Front panel

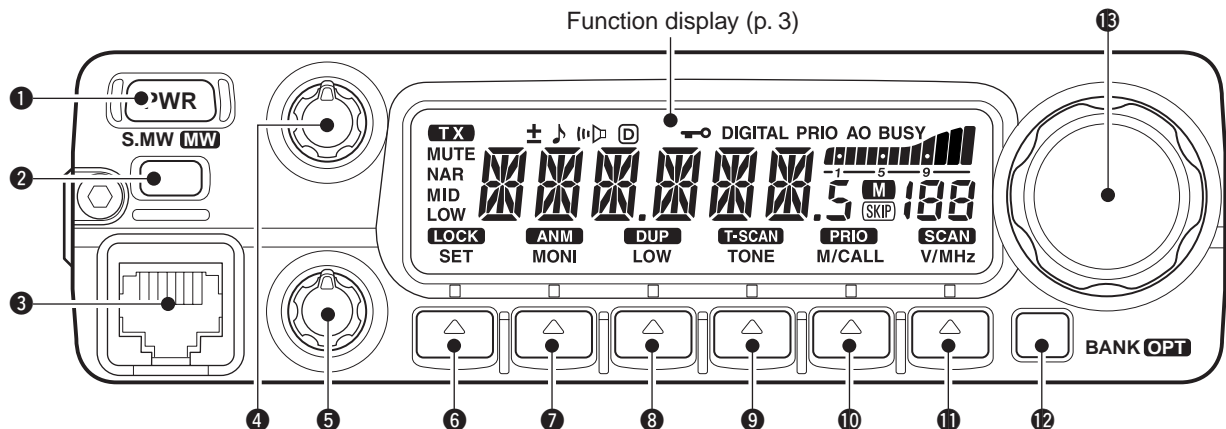

#### 1 POWER KEY [PWR]

Turns power ON and OFF when pushed for 1 sec.

#### 2 MEMORY WRITE KEY [S.MW MW] (p. 25)

➤ Selects a memory channel for programming.

➤ Programs the selected memory channel when pushed for 1 sec.

- Continue to hold the key to increment the memory channel automatically.

#### 3 MICROPHONE CONNECTOR

Connects the supplied microphone.

#### 4 VOLUME CONTROL [VOL] (p. 13)

Adjusts the audio level.

#### 5 SQUELCH CONTROL [SQL] (p. 13)

Varies the squelch level.

- The RF attenuator activates and increases the attenuation when rotated clockwise to the center position and further.

**6 SET•LOCK KEY [SET LOCK]**

- Enters set mode when pushed. (p. 74)
- Keys the lock function ON and OFF when pushed for 1 sec. (p. 12)

**7 MONITOR•CHANNEL NAME KEY [MONI ANM]**

- Push to switch the monitor function ON and OFF. (p. 13)
- In memory and call channel mode, switches the channel names or number ON and OFF. (p. 29)

**8 OUTPUT POWER•DUPLEX KEY [LOW DUP]**

- Each push changes the output power selection. (p. 16)
- Select DUP–, DUP+ and simplex operation when pushed for 1 sec. (p. 17)

**9 TONE•TONE SCAN KEY [TONE T-SCAN]**

- While in the analog (FM) mode operation.
  - Each push selects a tone function. (pgs. 17, 48)
    - Tone encoder, pocket beep, tone squelch or tone function OFF can be selected.
  - Push for 1 sec. to start/stop the tone scan function. (p. 51)
- While in the digital mode operation with the installing an optional Digital unit UT-118.
  - Each push select the digital code (CSQL) squelch function, call sign (DSQL) squelch, pocket beep function (CSQL or DSQL). (p. 67)

**10 MEMORY/CALL•PRIORITY KEY [M/CALL PRIO]**

- Push to select and toggle memory, call and weather channel\* modes. (pgs. 24, 35, 83)
  - \*Weather channels available for USA versions only.
- Starts priority watch when pushed for 1 sec. (p. 44)

**11 VFO/MHz TUNING•SCAN KEY [V/MHz SCAN]**

- Selects and toggles VFO mode and 1 MHz (or 10 MHz for some versions) tuning when pushed. (p. 9)
- Starts scan when pushed for 1 sec. (p. 38)
  - Cancels a scan when pushed during a scan.

**12 BANK•OPTION KEY [BANK OPT]**


- Push to select memory bank condition during memory mode. (p. 32)
- Push for 1 sec. to enter the DTMF or option set mode.

**13 TUNING DIAL [DIAL]**

Selects the operating frequency (p. 9), memory channel (p. 24), the setting of the set mode item and the scanning direction (p. 38).


◇ **Microphone connector** (front panel view)

- ① +8 V DC output (Max. 10 mA)
- ② Channel up/down
- ③ 8 V control IN
- ④ PTT
- ⑤ GND (microphone ground)
- ⑥ MIC (microphone input)
- ⑦ GND
- ⑧ Data IN



# 1 PANEL DESCRIPTION

## ■ Function display

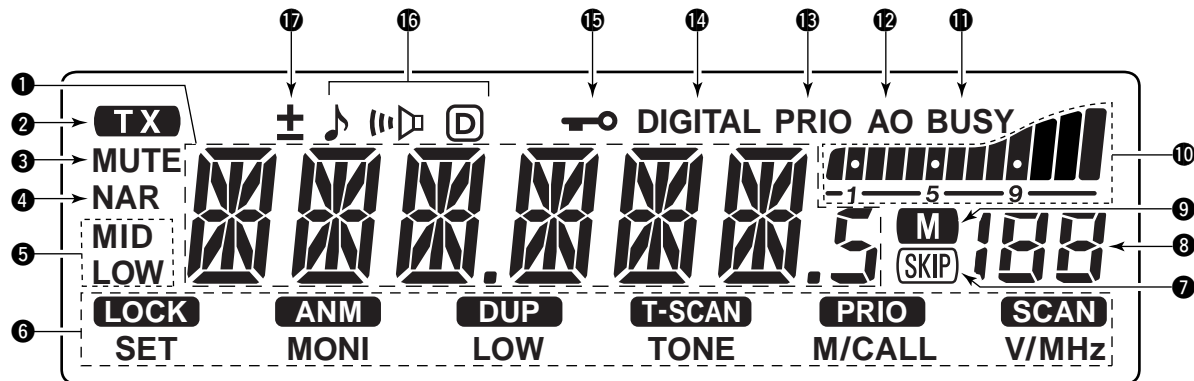

### ① FREQUENCY READOUT

Shows the operating frequency, channel names, set mode contents, etc.

- Frequency decimal point flashes while scanning. (p. 38)
- “d” appears in place of the 1st digit while the DTMF memory function is in use. (p. 45)

### ② TRANSMIT INDICATOR

- ➔ Appears while transmitting. (p. 15)
- ➔ Flashes while transmitting with the one-touch PTT function. (p. 16)

### ③ AUDIO MUTE INDICATOR (p. 14)

Appears when the audio mute function is activated via microphone control.

### ④ NARROW MODE INDICATOR (p. 78)

Appears when the narrow mode is selected.  
Narrow mode is not available with some versions.

### ⑤ OUTPUT POWER INDICATORS (p. 16)

“LOW” appears when low output power; “MID” and “LOW” appear when mid low output power; “MID” appears when middle output power is selected.

- Mid. low power is not available with some versions.



**6 KEY INDICATORS**

Indicate the function(s) of the front panel keys directly below the function display.

**7 SKIP INDICATOR** (p. 41)

Appears when the selected memory channel is specified as a skip channel.

**8 MEMORY CHANNEL NUMBER INDICATORS**

- Shows the selected memory channel number. (p. 24)
- “C” appears when the call channel is selected. (p. 35)

**9 MEMORY INDICATOR** (p. 24)

Appears when memory mode is selected.

**10 S/R F INDICATORS**

- Shows the relative signal strength while receiving signals. (p. 13)
- Shows the output power level while transmitting. (p. 16)

**11 BUSY INDICATOR** (p. 13)

- Appears when a signal is being received or the squelch is open.
- Flashes while the monitor function is activated.

**12 AUTO POWER-OFF INDICATOR** (p. 81)

Appears while the auto power-off function is in use.

**13 PRIORITY WATCH INDICATOR** (p. 44)

Appears while the priority watch is activated; blinks while the watch is paused.

**14 DIGITAL INDICATOR** (p. 61)

Appears when digital mode is selected.

**15 LOCK INDICATOR** (p. 12)

Appears when the lock function is activated.

**16 TONE INDICATORS**


- While in the analog (FM) mode operation.
  - “J” appears while the subaudible tone encoder is in use. (p. 17)
  - “D” appears while the tone (CTCSS) squelch function is in use. (p. 48)
  - “@” appears while the tone (DTCS) squelch function is in use. (p. 48)
  - “ll” appears with the “D” or “@” indicator while the pocket beep function (CTCSS or DTCS) is in use. (p. 48)
- While in the digital mode operation with the installing an optional Digital unit UT-118.
  - “D” appears while the digital code (CSQL) squelch function is in use. (p. 67)
  - “@” appears while the call sign (DSQL) squelch function is in use. (p. 67)
  - “ll” appears with the “D” or “@” indicator while the pocket beep function (CSQL or DSQL) is in use. (p. 67)

**17 DUPLEX INDICATORS** (p. 17)

“+” appears when plus duplex, “-” appears when minus duplex operation is selected.

# 1 PANEL DESCRIPTION

## ■ Rear panel

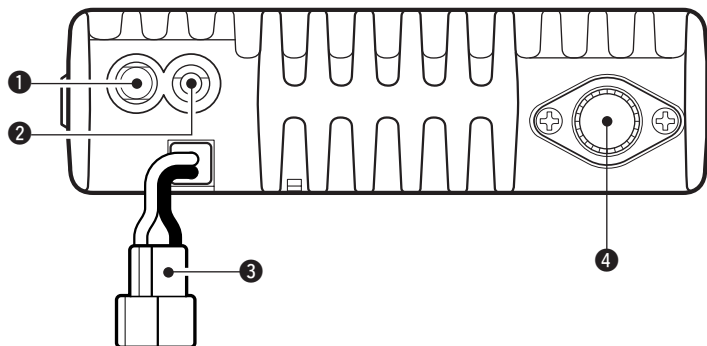


### 1 SPEAKER JACK [SP]

Accepts an 8  $\Omega$  speaker.

- Audio output power is more than 2.4 W.

### 2 DATA JACK [DATA]

Connects to a PC or GPS receiver via an RS-232C cable (D-sub 9-pin) for data communication in the RS-232C format.

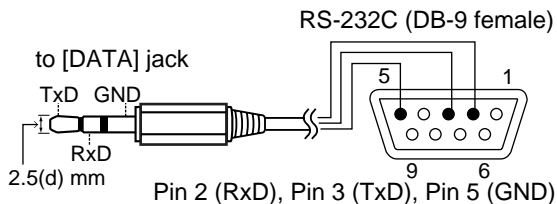

### 3 POWER RECEPTACLE [DC13.8V]

Accepts 13.8 V DC  $\pm 15\%$  with the supplied DC power cable.


**NOTE: DO NOT** use a cigarette lighter socket as a power source when operating in a vehicle. The plug may cause voltage drops and ignition noise may be superimposed onto transmit or receive audio.

### 4 ANTENNA CONNECTOR [ANT]

Connects a 50  $\Omega$  antenna with a PL-259 connector and a 50  $\Omega$  coaxial cable.

When making the connection between your transceiver and PC or other device, ensure that the correct connections are made otherwise data communications may fail.

## Microphone (HM-133V\*)

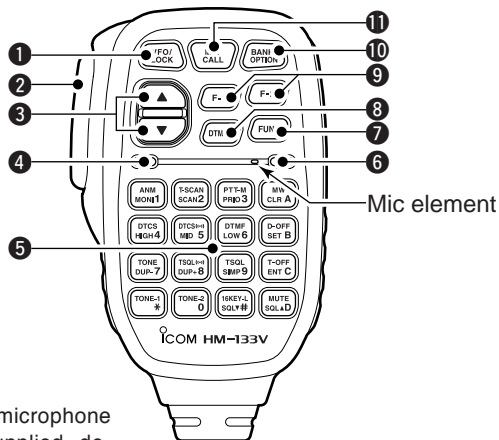

\*A different microphone may be supplied depending on version.

### 1 VFO/LOCK KEY [VFO/LOCK]

- Push to select VFO mode. (p. 9)
- Push for 1 sec. to switch the lock function ON and OFF. (p. 12)

### 2 PTT SWITCH

- Push and hold to transmit; release to receive.
- Switches between transmitting and receiving while the one-touch PTT function is in use. (p. 16)

### 3 UP/DOWN KEYS [▲]/[▼]

- Push either key to change operating frequency, memory channel, set mode setting, etc. (pgs. 10, 24)
- Push either key for 1 sec. to start scanning. (p. 38)

### 4 ACTIVITY INDICATOR

- Lights red while any key, except [FUNC] and [DTMF-S], is pushed, or while transmitting.
- Lights orange while the microphone keypad lock function is activated.
- Lights green while the one-touch PTT function is in use.

### 5 KEYPAD (pgs. 7, 8)

### 6 FUNCTION INDICATOR

- Lights orange while [FUNC] is activated—indicates the secondary function of keys can be accessed.
- Lights green when [DTMF-S] is activated—DTMF signals can be transmitted with the keypad.

### 7 FUNCTION KEY [FUNC] (pgs. 7, 8)

### 8 DTMF MEMORY SELECT KEY [DTMF-S] (p. 84)

### 9 FUNCTION KEYS [F-1]/[F-2] (p. 84)

Program and re-call your desired transceiver conditions.

### 10 BANK/OPTION KEY [BANK/OPTION]













- Push to select memory bank condition during memory mode. (p. 32)
- Push for 1 sec. to enter the DTMF or option set mode.

### 11 MEMORY/CALL KEY [MR/CALL]









- Push to select memory mode. (p. 24)
- Push for 1 sec. to select call channel. (p. 35)

# 1 PANEL DESCRIPTION

## ■ Microphone keypad

KEY	FUNCTION	SECONDARY FUNCTION (  +key)	OTHER FUNCTIONS
	Switches between opening and closing the squelch. (p. 13)	In memory mode switches the channel names or number indication ON and OFF. (p. 30)	After pushing  : Transmits the appropriate DTMF code. (pgs. 20, 46) When the DTMF memory encoder is activated, push [0] to [9] to transmit the appropriate DTMF memory contents. (p. 46)
	Starts and stops scanning. (p. 38)	Starts and stops tone scanning. (p. 51)	
	Starts and stops priority watch. (p. 44)	Turns the one-touch PTT function ON and OFF. (p. 16)	
	Selects high output power. (p. 16)	Turns the DTCS squelch ON. (p. 50) *Turns the DSQL function. (p. 67)	
	Selects mid. output power. (p. 16)	Turns the DTCS pocket beep function ON. (p. 49) *Turns the DSQL pocket beep function.	
	Selects low output power (p. 16)	Turns the DTMF memory encoder function ON. (p. 45)	
	Selects minus duplex operation. (p. 18)	Turns the subaudible tone encoder ON. (p. 18)	
	Selects plus duplex operation. (p. 18)	Turns the CTCSS pocket beep function ON. (p. 49) *Turns the CSQL pocket beep function.	
	Selects simplex operation. (p. 18)	Turns the tone squelch function ON. (p. 50) *Turns the CSQL function. (p. 67)	
	No primary function.	Sends a 1750 Hz tone signal while pushing and holding. (p. 20)	

\*While in the digital mode operation with the installing an optional Digital unit UT-118.

KEY	FUNCTION	SECONDARY FUNCTION (  +key)	OTHER FUNCTIONS
	<ul style="list-style-type: none"> <li>➔ Cancels frequency entry. (p. 10)</li> <li>➔ Cancels the scan or priority watch. (pgs. 38, 44)</li> <li>➔ Exit set mode. (p. 74)</li> </ul>	<ul style="list-style-type: none"> <li>➔ Selects a memory channel for programming. (p. 26)</li> <li>➔ Advances the memory channel number when continuously pushed after programming is completed. (p. 26)</li> </ul>	<p>After pushing :</p> <p>Transmits the appropriate DTMF code. (pgs. 20, 46)</p>
	<ul style="list-style-type: none"> <li>➔ Enters set mode (p. 74)</li> <li>➔ Advances the set mode selection order after entering set mode. (p. 74)</li> </ul>	DTMF memory OFF. (p. 46)	
	<ul style="list-style-type: none"> <li>➔ Sets the keypad for numeral input. (p. 10)</li> <li>➔ Reverses the set mode selection order after entering set mode. (p. 74)</li> </ul>	<p>Turns the subaudible tone encoder, pocket beep or CTCSS/DTCS tone squelch OFF. (pgs. 18, 49, 50)</p> <p>*Turns the pocket beep or CSQL/DSQL OFF. (p.63)</p>	
	Adjusts the squelch level increments. (p. 13)	<p>Mutes the audio. (p. 14)</p> <ul style="list-style-type: none"> <li>• Mute function is released when any operation is performed.</li> </ul>	
	No primary function.	Sends a 1750 Hz tone signal for 0.5 sec. (p. 20)	
	Adjusts the squelch level decrement. (p. 13)	<p>Locks the digit keys on the keypad (including the A to D, # and * keys. (p. 12)</p> <ul style="list-style-type: none"> <li>• Lights orange while the microphone keypad lock function is activated.</li> </ul>	

\*While in the digital mode operation with the installing an optional Digital unit UT-118.

## ■ Preparation

### ◇ Turning power ON/OFF




→ Push **[PWR]** for 1 sec. to turn power ON and OFF.


Push **[PWR]** for 1 sec.

### ◇ VFO mode selection

The transceiver has 2 basic operating modes: VFO mode and memory mode.




→ Push **[V/MHz SCAN]** to select VFO mode.




→ Push **[VFO/LOCK]** to select VFO mode.

## ■ Using the tuning dial

① Rotate **[DIAL]** to set the frequency.




**[DIAL]**



- If VFO mode is not selected, push **[V/MHz SCAN]** to select VFO mode.
- The frequency changes according to the selected tuning steps. (p. 11)

② To change the frequency in 1 MHz (10 MHz for some versions) steps, push **[V/MHz SCAN]**, then rotate **[DIAL]**.



- Pushing **[V/MHz SCAN]** for 1 sec. starts scan function. If scan starts, push **[V/MHz SCAN]** again to cancel it.

The display shows that the 1 MHz tuning step is selected.



Note that in this manual, sections beginning with a microphone icon (as above), designate operation via the HM-133V microphone.

## ■ Using the keypad

The frequency can be directly set via numeral keys on the microphone.




- 1 Push **[VFO/LOCK]** to VFO mode, if necessary.
- 2 Push **[ENT C(T-OFF)]** to activate the keypad for digit input.
- 3 Push 6 keys to input a frequency.
  - When a digit is mistakenly input, push **[ENT C(T-OFF)]** to clear the input, then repeat input from the 1st digit.
  - Pushing **[CLR A(MW)]** clears input digits and retrieves the frequency.


**[EXAMPLE]:** Setting frequency to 145.3625 MHz.



Push **VFO/LOCK**



Push **T-OFF ENT C**




Push **ANM MONI1**

**DTCS HIGH 4**


**DTCS MID 5**

**PTT-M PRIO 3**

**DTMF LOW 6**



Push **T-SCAN SCAN2**



## ■ Using the [▲]/[▼] keys



- ➔ Push **[▲]** or **[▼]** to select the desired frequency.
- Pushing **[▲]/[▼]** for 1 sec. activates a scan. If scan starts, push **[▲]/[▼]** again or push **[CLR A(MW)]** to cancel it.

## 2 SETTING A FREQUENCY

### ■ Tuning step selection

Tuning steps are the minimum frequency change increments when you rotate **[DIAL]** or push **[▲]/[▼]** on the microphone. The following tuning steps are available.


- 5 kHz
- 10 kHz
- 12.5 kHz
- 15 kHz
- 20 kHz
- 25 kHz
- 30 kHz
- 50 kHz

**NOTE:** For convenience, select a tuning step that matches the frequency intervals of repeaters in your area.



[DIAL]

15 kHz tuning step



- ① Push **[V/MHz/SCAN]** to select VFO mode, if necessary.
- ② Push **[SET/LOCK]** to enter set mode.
- ③ Push **[SET]** or **[MONI]** several times until "TS" appears as shown at left.
- ④ Rotate **[DIAL]** to select the desired tuning step.
- ⑤ Push any key other than indicated function keys to exit set mode.

### USING SET MODE



- ① Push **[VFO/LOCK]** to select VFO mode, if necessary.
- ② Push **[SET B(D-OFF)]** to enter set mode.
- ③ Push **[SET B(D-OFF)]** or **[ENT C(T-OFF)]** several times until "TS" appears.
- ④ Push **[▲]** or **[▼]** to select the desired tuning step.
- ⑤ Push **[CLR A(MW)]** to exit set mode.



## ■ Lock functions

To prevent accidental channel changes and unnecessary function access, use the lock function. The transceiver has 2 different lock functions.


### ◇ Frequency lock

This function locks [DIAL] and keys electronically and can be used together with the microphone lock function.



➔ Push **[SET LOCK]** for 1 sec. to turn the lock function ON and OFF.

- [PTT], [MONI ANM], [VOL] and [SQL] can be used while the channel lock function is in use. Also, TONE-1, TONE-2, DTMF tones or DTMF memory contents can be transmitted from the microphone.



➔ Push **[VFO/LOCK]** for 1 sec. to switch the lock function ON and OFF.

### ◇ Microphone keypad lock

This function locks the microphone keypad.




➔ Push **[FUNC]** then **[SQL▼ # (16KEY-L)]** to switch the microphone keypad lock function ON and OFF.

- Lights orange while the microphone keypad lock function is activated.
- [PTT], [VFO/LOCK], [MR/CALL], [BANK/OPTION], [▲], [▼], [F-1], [F-2], [DTMF-S] and [FUNC] on the microphone can be used.
- All keys on the transceiver can be used.
- The keypad lock function is released when the power is turned OFF then ON again.

## Receiving

- ① Push **[PWR]** for 1 sec. to turn power ON.
- ② Set the audio level.
  - ➔ Push **[MONI/ANM]** to open the squelch.
  - ➔ Rotate the **[VOL]** control to adjust the audio output level.
  - ➔ Push **[MONI/ANM]** again to close the squelch.
- ③ Set the squelch level.
  - ➔ Rotate **[SQL]** fully counterclockwise in advance.
  - ➔ Rotate **[SQL]** clockwise until the noise just disappears.
  - ➔ When interference is received, rotate **[SQL]** clockwise again for attenuator operation. (p. 14)
- ④ Set the operating frequency. (pgs. 9, 10)
- ⑤ When receiving a signal on the set frequency, squelch opens and the transceiver emits audio.


Appears when receiving a signal. • “BUSY” appears and the S/RF indicator shows the relative signal strength for the received signal.



### ✓CONVENIENT!



The squelch level can also be adjusted with **[SQL▲ D(MUTE)]** and **[SQL▼ # (16KEY-L)]**.




## Monitor function

This function is used to listen to weak signals without disturbing the squelch setting or to open the squelch manually even when mute functions such as the tone squelch are in use.



- ➔ Push **[MONI/ANM]** to open the squelch.
  - “BUSY” blinks.
  - Push **[MONI/ANM]** again to cancel the function.



- ➔ Push **[MONI 1(ANM)]** to open the squelch.
  - Push **[MONI 1(ANM)]** again to cancel the function.


**NOTE:** When **[SQL]** adjustment is set too far clockwise, (12–17 o'clock position) the squelch attenuator is activated. To monitor weak signals on the operating frequency, deactivate the squelch attenuator function. See p. 82 for details.

## ■ Audio mute function

This function temporarily mutes the audio without disturbing the volume setting.




- ➔ Push **[FUNC]** then **[SQL▲ D(MUTE)]** to mute audio signals.
  - “MUTE” appears.
  - Push **[CLR A(MW)]** (or any other key) to cancel the function.



## ■ Squelch attenuator

The transceiver has an RF attenuator related to the squelch level setting. Approx. 10 dB attenuation is obtained at maximum setting.

- ➔ Rotate **[SQL]** clockwise past the 12 o'clock position to activate the squelch attenuator.
  - Attenuation level can be adjusted up to 10 dB (approx.) between 12 o'clock and fully clockwise position.
  - When setting the squelch from the microphone, a level greater than '19' activates the squelch attenuator.

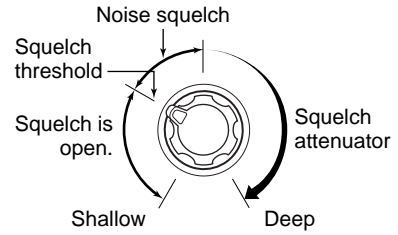

**NOTE:** The squelch attenuator functions even when the monitor function is in use. Thus set the [SQL] within 10 to 12 o'clock position (12 to 19 level when setting with the HM-133V) is recommended when using the monitor function.


### 3 BASIC OPERATION

## ■ S-meter squelch

### USING INITIAL SET MODE


The transceiver has an S-meter squelch. The S-meter squelch allows you to set minimum signal level needed to open the squelch.

- ① Turn the transceiver power OFF.
- ② While pushing [**SET LOCK**], push [**PWR**] for 1 sec. to enter initial set mode.




[PWR] [SET **LOCK**]

- ③ Push [**SET**] or [**MONI**] to select “SSQ” (S-meter squelch) item.
- ④ Rotate [**DIAL**] to set the S-meter level or OFF.



S-meter squelch OFF (default)



S2 level (2 indicator level)

- ⑤ Push [**PWR**] to exit initial set mode.

## ■ Transmitting

**CAUTION:** Transmitting without an antenna will damage the transceiver.

**NOTE:** To prevent interference, listen on the channel before transmitting by pushing [**MONI/ANM**], or [**MONI 1(ANM)**] on the microphone.

- ① Set the operating frequency. (pgs. 9, 10)
  - Select output power if desired. See section at right for details.
- ② Push and hold [**PTT**] to transmit.
  - “**TX**” appears.
  - The S/Rf indicator shows the output power selection.
  - A one-touch PTT function is available. See p. 16 for details.
- ③ Speak into the microphone using your normal voice level.
  - DO NOT hold the microphone too close to your mouth or speak too loudly. This may distort the signal.
- ④ Release [**PTT**] to return to receive.

### **IMPORTANT!** (for 65 W transmission):





The IC-2200H is equipped with current detector circuit to protect the power amplifier circuit from high current flowing. When a high SWR (Standing Wave Ratio) antenna or no antenna is connected, or when the connected power supply's voltage includes, the transceiver reduces transmit output power to 10–20 W (approx.) automatically.

## ■ Selecting output power

The transceiver has 4\* output power levels to suit your operating requirements. Low output powers during short-distance communications may reduce the possibility of interference to other stations and will reduce current consumption.

\*The Taiwan version has only 3 levels.




Push [**LOW/DUP**] several times to select the output power.

S/R/F INDICATOR	POWER OUTPUT	
		Taiwan
High: 	65 W (50 W <sup>†</sup> )	24 W
Mid.: 	25 W*	10 W*
Mid. Low: 	10 W*	N/A
Low: 	5 W*	5 W*

\*approx., †Korea version

• The output power can be changed while transmitting.

The microphone can also be used to select output power.


➔ Push [**HIGH 4(DTCS)**] for high output power; [**MID 5(DTCS (·))**] for middle output power (push again for mid. low output power); and [**LOW 6(DTMF)**] for low output power.


- The output power can be changed via the microphone during receive only.

## ■ One-touch PTT function

The PTT switch can be operated as a one-touch PTT switch (each push switches between transmit/receive). Using this function you can transmit without pushing and holding the PTT switch.

To prevent accidental, continuous transmissions with this function, the transceiver has a time-out timer. See p. 80 for details.

- 1  Push [**FUNC**] then [**PRIO 3(PTT-M)**] to turn the one-touch PTT function ON.
  - The activity indicator lights green.
- 2 Push [**PTT**] to transmit and push again to receive.
  - Two beeps sound when transmission is started and a long beep sounds when returning to receive.
  - “**TX**” flashes when transmitting with the one-touch PTT function.




- 3 Push [**FUNC**] then [**PRIO 3(PTT-M)**] to turn the one-touch PTT function OFF.
  - The activity indicator goes out.

## ■ Accessing a repeater


- ① Set the receive frequency (repeater output frequency). (pgs. 9, 10)
- ② Push [**LOW DUP**] for 1 sec., once or twice, to select minus duplex or plus duplex.
  - “-” or “+” appears to indicate the transmit frequency for minus shift or plus shift, respectively.
  - When the auto repeater function is turned ON (available for the USA version only), steps ② and ③ are not necessary. (p. 23)

Either “-” or “+” appears.

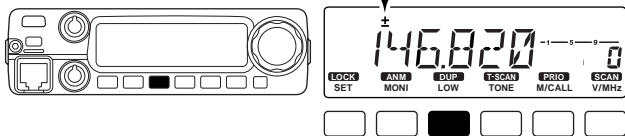


- ③ Push [**TONE T-SCAN**] several times to turn ON the sub-audible tone encoder, according to repeater requirements.
  - “♪” appears
  - 88.5 Hz is set as the default; refer to p. 19 for tone frequency settings.
  - When the repeater requires a different tone system, see p. 20.

Appears

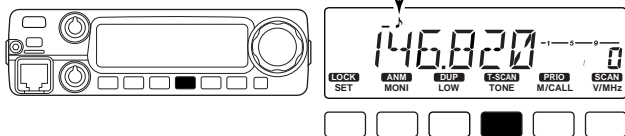

- ④ Push and hold [**PTT**] to transmit.
  - The displayed frequency automatically changes to the transmit frequency (repeater input frequency).
  - If “OFF” appears, confirm that the offset frequency (p. 21) is set correctly.
- ⑤ Release [**PTT**] to receive.



While receiving

While transmitting


- ⑥ Push [**MONI ANM**] to check whether the other station's transmit signal can be received directly.
- ⑦ To return to simplex operation, push [**LOW DUP**] for 1 sec., once or twice, to clear the “-” or “+” indicator.
- ⑧ To turn OFF the subaudible tone encoder, push [**TONE T-SCAN**] several times until no tone indicators appear.



1 Set the receive frequency (repeater output frequency). (pgs. 9, 10)




2 Push **[DUP- 7(TONE)]** to select minus duplex; push **[DUP+ 8(TSQL (•))]** to select plus duplex.

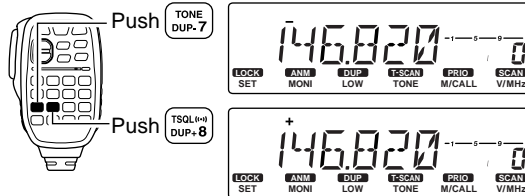

3 Push **[FUNC]** then **[DUP- 7(TONE)]** to turn ON the subaudible tone encoder according to repeater requirements.

- Refer to p. 19 for the tone frequency setting.
- When the repeater requires a different tone system, see p. 20.

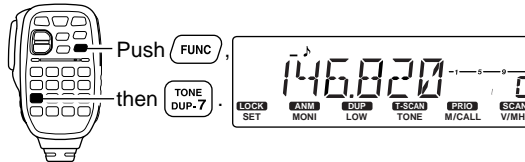

- 4 Push and hold **[PTT]** to transmit.  
 5 Release **[PTT]** to receive.  
 6 Push **[MONI 1(ANM)]** to check whether the other station's transmit signal can be received directly.



7 Push **[SIMP 9(TSQL)]** to return to simplex operation.

- “+” or “-” indicator disappears.

8 To turn OFF the subaudible tone encoder, push **[FUNC]** then **[ENT C(T-OFF)]**.


## 4 REPEATER OPERATION

### ■ Subaudible tones (Encoder function)

*USING SET MODE*

#### ◇ Subaudible tones

- ① Select the mode/channel you wish to set the subaudible tones to, such as VFO mode or memory/call channel.
- ② Push **[SET LOCK]** to enter set mode.
- ③ Push **[SET]** or **[MONI]** several times until “♪” and “rt” appears; or until “⌂” and “Ct” appears for tone squelch or pocket beep use.
  - When “d” is displayed in place of the 100 MHz digit, cancel the DTMF memory encoder in advance. (p. 46)

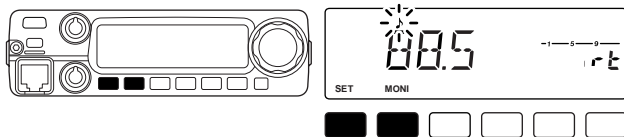


- ④ Rotate **[DIAL]** to select and set the desired subaudible frequency.
- ⑤ Push any key other than **[SET]** or **[MONI]** to exit set mode.

**NOTE:** The subaudible tone encoder frequency can be set in a memory/call channel temporarily. However, the set frequency is cleared once another memory channel or VFO mode is selected. To store the tone frequency permanently, overwrite the channel information.



- ① Set the mode/channel you wish to set the subaudible tones to, such as VFO mode or memory/call channel.
  - The subaudible tone frequency is independently programmed into each mode or channel.
- ② Push **[SET B(D-OFF)]** to enter set mode.
- ③ Push **[SET B(D-OFF)]** or **[ENT C(T-OFF)]** several times until “♪” and “rt” appears; or until “⌂” and “Ct” appears for tone squelch or pocket beep use.
  - When “d” is displayed in place of the 100 MHz digit, cancel the DTMF memory encoder in advance. (p. 46)

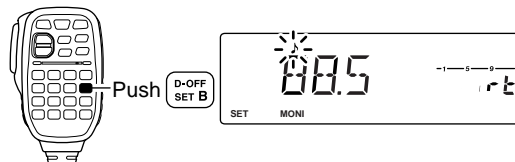

- ④ Push **[▲]** or **[▼]** to select and set the desired subaudible tone frequency.
  - Push and hold **[▲]/[▼]** to change the above tones continuously.
- ⑤ Push **[CLR A(MW)]** to exit set mode.

#### • Subaudible tone frequency list

(unit: Hz)

67.0	79.7	94.8	110.9	131.8	156.7	171.3	186.2	203.5	229.1
69.3	82.5	97.4	114.8	136.5	159.8	173.8	189.9	206.5	233.6
71.9	85.4	100.0	118.8	141.3	162.2	177.3	192.8	210.7	241.8
74.4	88.5	103.5	123.0	146.2	165.5	179.9	196.6	218.1	250.3
77.0	91.5	107.2	127.3	151.4	167.9	183.5	199.5	225.7	254.1



◇ DTMF tones



➔ Push **[DTMF-S]**, then push the keys of the desired DTMF digits.


- The function indicator lights green.
- 0–9, A–D, \* (E) and # (F) are available.
- When “d” is displayed in place of the 100 MHz digit, cancel the DTMF memory encoder in advance. (p. 46)
- Push **[DTMF-S]** again to return the keypad to normal function control.
- The transceiver has 10 DTMF memory channels for autopatch operation. See p. 45 for details.



Push **[DTMF-S]**,  
then push desired keys.

◇ 1750 Hz tone

The microphone has 1750 Hz tone capability, used for ring tone when calling, etc.



1 Push **[FUNC]**.

- The function indicator lights orange.

2 Push **[\*(TONE-1)]** to transmit a 1750 Hz tone call signal for 0.5 sec.; push and hold **[0(TONE-2)]** to transmit a 1750 Hz tone call signal for an arbitrary period.

- The function indicator goes out automatically.



Push **[FUNC]**,  
then **[\*(TONE-1)]** or **[TONE-2 0]**.


## 4 REPEATER OPERATION

### ■ Offset frequency

*USING SET MODE*

When communicating through a repeater, the transmit frequency is shifted from the receive frequency by an amount determined by the offset frequency.

- ① Push **[SET LOCK]** to enter set mode.
- ② Push **[SET]** or **[MONI]** until “±” and offset frequency appear.

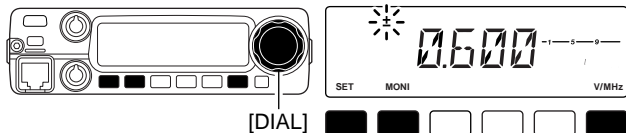

- ③ Rotate **[DIAL]** to set the desired offset frequency.
  - Push **[V/MHz]** to select the 1 MHz tuning steps.
- ④ Push any key other than indicated function keys to exit set mode.



- ① Push **[SET B(D-OFF)]** to enter set mode.
- ② Push **[SET B(D-OFF)]** or **[ENT C(T-OFF)]** until “±” and offset frequency appear.



Push



- ③ Push **[▲]** or **[▼]** to set the desired offset.
  - Direct frequency entry from the keypad is not possible.
- ④ Push **[CLR A(MW)]** to exit set mode.

### ■ Repeater lockout

*USING INITIAL SET MODE*

This function helps prevent interference to other stations by inhibiting your transmission when a signal is received. The transceiver has two inhibiting conditions, repeater and busy.

- ① Push **[PWR]** to turn power OFF.
- ② While pushing **[SET LOCK]**, turn power ON to enter initial set mode.



**[PWR] [SET LOCK]**

- ③ Push **[SET]** or **[MONI]** several times until the “RLO” display appears as shown below.
- ④ Rotate **[DIAL]** to turn the repeater lockout function to “RP,” “BU” or OFF.



- “RP”: Transmit is inhibited when a signal with un-matched sub-audible tone is received.
  - “BU”: Transmit is inhibited when a signal is received.
- ⑤ Push **[PWR]** to exit initial set mode.

## ■ Reversed duplex mode

### USING SET MODE

When the reversed duplex mode is selected, the receive frequency shifts. (Transmit frequency shifts in normal duplex mode.) Each receive and transmit frequency is shown in the table below with the following conditions;

Input frequency : 145.30 MHz  
 Direction : – (negative)  
 Offset frequency : 0.6 MHz

Reversed	OFF	ON
Rx frequency	145.30 MHz	144.70 MHz
Tx frequency	144.70 MHz	145.30 MHz


- ① Push **[SET LOCK]** to enter set mode.
- ② Push **[SET]** or **[MONI]** several times until the “REV” display appears as shown below.
- ③ Rotate **[DIAL]** to turn the reversed duplex mode ON or OFF.



- ④ Push any key other than **[SET]** or **[MONI]** to exit set mode.



- ① Push **[SET B(D-OFF)]** to enter set mode.
- ② Push **[SET B(D-OFF)]** or **[ENT C(T-OFF)]** until “REV” appears.

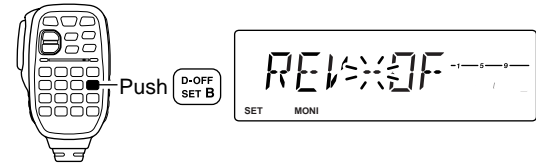

- ③ Push **[▲]** or **[▼]** to set the reversed duplex mode ON and OFF.
- ④ Push **[CLR A(MW)]** to exit set mode.


## 4 REPEATER OPERATION

### ■ Auto repeater (U.S.A. version only)

The USA version automatically activate the repeater settings (DUP- or DUP+ and tone encoder ON/OFF) when the operating frequency falls within the general repeater output frequency range and deactivate them when outside of the range.

#### ◇ Setting the auto repeater function ON/OFF

- ① Push **[PWR]** to turn power OFF.
- ② While pushing **[SET LOCK]**, turn power ON to enter initial set mode.



[PWR] [SET **LOCK**]


- ③ Push **[SET LOCK]** several times until the “RPT” display appears as shown above right.

#### USING INITIAL SET MODE

- ④ Rotate **[DIAL]** to turn the auto repeater function to “R1,” “R2” or OFF.



Auto repeater function is turned OFF.



Auto repeater function is ON, tone encoder is ON.

- “R1”: auto repeater is ON, tone encoder is OFF.
- “R2”: auto repeater is ON, tone encoder is ON.

- ⑤ Push **[PWR]** to exit initial set mode.

#### ◇ Frequency range and offset direction

Frequency range	Duplex direction
145.200–145.495 MHz 146.610–146.995 MHz	“-” appears
147.000–147.395 MHz	“+” appears


## ■ General description

The transceiver has 207 memory channels including 6 scan edge memory channels (3 pairs), and 1 call channel. Each of these channels can be individually programmed with operating frequency (pgs. 9, 10), duplex direction (p. 17) and offset (p. 21), subaudible tone encoder or tone squelch and its tone frequency (pgs. 19, 48–50) and skip information\* (p. 41). In addition, a total of 10 memory banks, A to J, are available for usage by group, etc.

\*except for scan edge memory channels.


## ■ Memory channel selection

### ◇ Using the tuning dial




- 1 Push **[M/CALL PRT]** once or twice to select memory mode.
  - “M” indicator appears.
- 2 Rotate **[DIAL]** to select the desired memory channel.
  - Programmed memory channels only can be selected.

### ◇ Using the [▲]/[▼] keys



- 1 Push **[MR/CALL]** to select memory mode.
- 2 Push **[▲]** or **[▼]** to select and set the desired memory channel.
  - Pushing **[▲]/[▼]** for 1 sec. activates a scan.
  - If scan is activated, push **[▲]/[▼]** again or push **[CLR A(MW)]** to stop it.

### ◇ Using the keypad



- 1 Push **[MR/CALL]** to select memory mode.
- 2 Push **[ENT C(T-OFF)]** to activate the keypad for numeral input.
- 3 Push 3 appropriate digit keys to input a channel number.
  - When inputting non-programmed channel numbers, the previous memory channel appears.
  - Push only 1 appropriate digit key, **[MONI 1(ANM)]**, **[SCAN 2(T-SCAN)]** or **[PRIO 3(PTT-M)]**, then push **[\*(TONE-1)]** or **[SQL▼ #(16KEY-L)]** to select scan edge channels. “\*” and “#” can be used for “A” and “b” respectively.

## 5 MEMORY OPERATION

### ■ Programming a memory channel

VFO settings, including the set mode contents such as sub-audible tone frequency, etc., can be programmed into a memory channel.


- ① Set the desired frequency in VFO mode.
  - ➔ Push **[V/MHz SCAN]** to select VFO mode.
  - ➔ Set the frequency using **[DIAL]**.
  - ➔ Set other data (e.g. tone frequency, duplex information, etc.) if required.
- ② Push **[S.MW MW]** momentarily.
  - “**M**” indicator and the memory channel number blink.

- ③ Rotate **[DIAL]** to select the memory channel to be programmed.
  - Memory channels not yet programmed are blank.
- ④ Push **[S.MW MW]** for 1 sec. to program.
  - 3 beeps sound.
  - Memory channel number automatically increases when continuing to push **[S.MW MW]** after programming.

#### ✓ CONVENIENT

Memory programming can be performed in versatile ways e.g. memory channel to the same (or different) memory channel, memory channel to the call channel, etc.


**[EXAMPLE]:** Programming 145.870 MHz into memory channel 20 (blank channel) via the front panel.

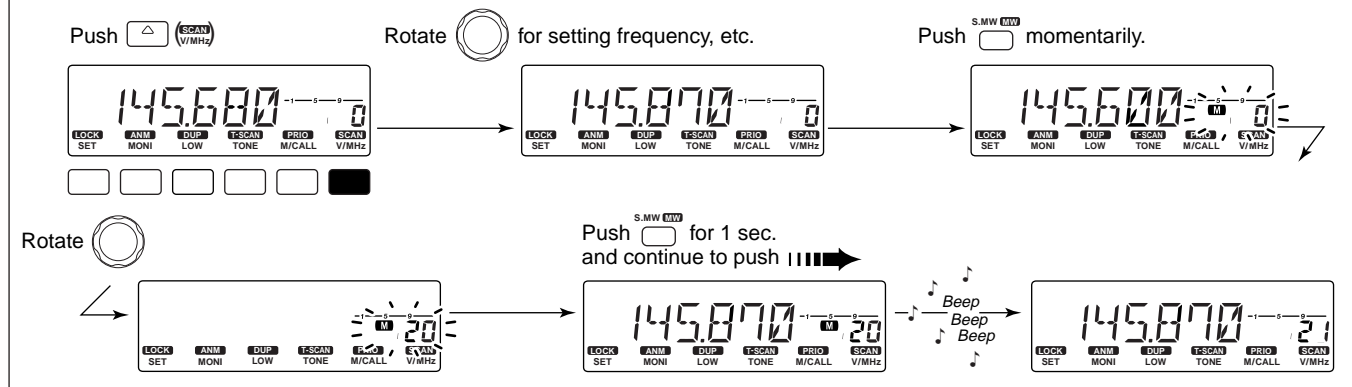

◇ Programming a memory channel via the microphone

**MW** The microphone can also be used to program memory channels.

- 1 Set the desired frequency in VFO mode.
  - ➔ Push **[VFO/LOCK]** to select VFO mode.
  - ➔ Set the frequency using the keypad.
  - ➔ Set other data (e.g. offset frequency, duplex direction, sub-audible tone encoder ON/OFF and its frequency), if necessary.
- 2 Push **[FUNC]** then **[CLR A(MW)]** momentarily.
- 3 Select the memory channel to be programmed.
  - ➔ Push **[▲]** or **[▼]** to select the memory channel (direct numerical input cannot be used).
- 4 Push **[FUNC]** then **[CLR A(MW)]** for 1 sec. to program.
  - ➔ 3 beeps may sound and the VFO contents (including the subaudible tone frequency, etc.) are programmed.
  - ➔ Memory channel number increases when continuing to push **[CLR A(MW)]** after programming.

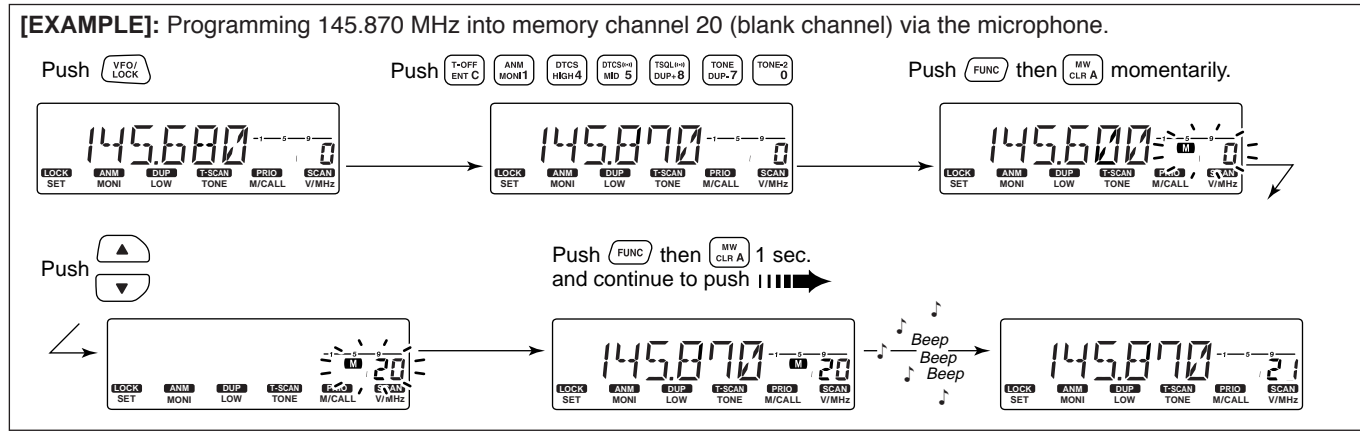


## 5 MEMORY OPERATION

### ■ Transferring memory contents

This function transfers a memory channel's contents to VFO (or another memory/call channel). This is useful when searching for signals around a memory channel frequency and for recalling the offset frequency, subaudible tone frequency etc.

#### ◇ Memory/call → VFO

- Select the memory/call channel to be transferred.
  - ➔ Push **[M/CALL P<sub>RI</sub>O]** to select memory mode, then rotate **[DIAL]** to select the desired memory channel.
  - ➔ Push **[M/CALL P<sub>RI</sub>O]** for 1 sec. to select the call channel.
- Push **[S.MW MW]** for 1 sec. to transfer the selected memory/call channel contents to the VFO.
  - VFO mode is selected automatically.




- Select the memory/call channel to be transferred.
  - ➔ Push **[MR/CALL]** to select memory mode, then select the desired memory channel via **[▲]/[▼]** or keypad.
  - ➔ Push **[MR/CALL]** for 1 sec. to select the call channel.
- Push **[FUNC]**, then **[CLR A(MW)]** for 1 sec. to transfer the selected memory/call channel contents to the VFO.
  - VFO mode is selected automatically.


**[EXAMPLE]:** Transferring memory channel 30 contents to VFO.

#### Front panel operation:


Push to select memory mode.



Rotate for setting memory channel.



Push for 1 sec.



#### HM-133V operation:

Push to select memory mode.


Select memory channel.

Push then push for 1 sec.



◇ Memory/call⇄call/memory

- ① Select the memory/call channel to be transferred.
  - ➔ Push **[M/CALL Prio]** to select memory mode, then rotate **[DIAL]** to select the desired memory channel.
  - ➔ Push **[M/CALL Prio]** for 1 sec. to select the call channel.
- ② Push **[S.MW MW]** momentarily.
  - “M” indicator and “--” indication blink, and shows VFO conditions.
- ③ Rotate **[DIAL]** to select the target memory channel.
  - “C” blinks when the call channel is selected.
  - Scan edge channels, 1A/1b, 2A/2b, 3A/3b, can also be selected.
- ④ Push **[S.MW MW]** for 1 sec. to transfer the selected memory/call channel contents to the target memory.
  - The targeted memory and transferred contents are indicated.



- ① Select the memory/call channel to be transferred.
  - ➔ Push **[MR/CALL]** to select memory mode, then select the desired memory channel via **[▲]/[▼]** or keypad.
  - ➔ Push **[MR/CALL]** for 1 sec. to select the call channel.
- ② Push **[FUNC]**, then **[CLR A(MW)]** momentarily.
  - “M” indicator and “--” indication blink, and shows VFO conditions.
- ③ Push **[▲]/[▼]** to select the target memory channel.
  - “C” blinks when the call channel is selected.
  - Scan edge channels can also be selected.
  - The keypad cannot be used for the selection.
- ④ Push **[FUNC]** then push **[CLR A(MW)]** for 1 sec. to transfer the selected memory/call channel contents to the target memory.
  - The targeted memory and transferred contents are indicated.

**[EXAMPLE]:** Transferring memory channel 30 contents to channel 31.

**Front panel operation:**  
 Select the memory channel, then push . Select the target channel. Push for 1 sec.

**HM-133V operation:**  
 Select the memory channel, push then push . Push then push for 1 sec.

## 5 MEMORY OPERATION

### ■ Programming channel names

Each memory channel and the call channel can be programmed with an alphanumeric channel name for easy recognition and can be indicated independently by channel. Names can be a maximum of 6 characters— see the table below for available characters.

(space)	1 (+)	-- (-)	-- (=)	* (*)	/ (/)	! (!)	! (!)	! (!)	0 (0)
1 (1)	2 (2)	3 (3)	4 (4)	5 (5)	6 (6)	7 (7)	8 (8)	9 (9)	A (A)
B (B)	C (C)	D (D)	E (E)	F (F)	G (G)	H (H)	I (I)	J (J)	K (K)
L (L)	M (M)	N (N)	O (O)	P (P)	Q (Q)	R (R)	S (S)	T (T)	U (U)
V (V)	W (W)	X (X)	Y (Y)	Z (Z)					


- 1 Push **[M/CALL PRIORITY]** to select memory mode.
- 2 Rotate **[DIAL]** to select the desired memory channel.
- 3 Push **[MONI ANM]** for 1 sec. to select channel name indication mode.
  - 1 short and 1 long beep sound.

- 4 Push **[SET LOCK]** to select the channel name programming condition.
  - Frequency readouts disappear.
- 5 Rotate **[DIAL]** to select the desired character.
  - The selected character blinks.
- 6 Push **[SET]** or **[MONI]** to move the cursor to left or right, respectively.
- 7 Repeat steps 5 and 6 until the desired channel names are displayed.
- 8 Push any key other than **[SET]** or **[MONI]** to program the name and exit the channel name programming condition.
- 9 Push **[MONI ANM]** for 1 sec. to return to frequency indication if desired.


**IMPORTANT!** Once channel name indication mode is selected, always access the channel name programming condition when **[SET LOCK]** is pushed. When set mode accessing is necessary, cancel the channel name indication by pushing **[MONI ANM]** for 1 sec., then access to set mode.

**[EXAMPLE]:** Programming “CLUB” into memory channel 1.

Select memory channel 15, then push **[MONI ANM]** for 1 sec.



Rotate **[DIAL]** to select the character.




Push **[SET]** or **[MONI]** to move the cursor.



Repeat previous steps.

Push any other keys than **[SET]** or **[MONI]**.





Channel names can also be programmed via the microphone.


- 1 Select the memory/call channel to be assigned memory names.
  - ➔ Push **[MR/CALL]** to select memory mode, then select the desired memory channel via **[▲]/[▼]** or keypad.
    - Scan edge channels can also be selected.
  - ➔ Push **[MR/CALL]** for 1 sec. to select the call channel.
- 2 Push **[FUNC]**, then **[MONI 1(ANM)]** momentarily.
- 3 Push **[SET B(D-OFF)]**.
  - Frequency readouts disappear.
- 4 Push **[▲]/[▼]** to select the desired character.
  - The selected character blinks.
- 5 Push **[SET B(D-OFF)]** or **[ENT C(T-OFF)]** to move the cursor to left or right, respectively.
- 6 Repeat steps 4 and 5 until the desired channel names are displayed.
- 7 Push **[CLR A(MW)]** to program the name and exit the channel name programming condition.
- 8 Push **[FUNC]**, then push **[MONI 1(ANM)]** to return to frequency indication if desired.

**[EXAMPLE]:** Programming “CLUB” into memory channel 15.


Select memory channel 15, push **[FUNC]**, then push **[ANM MON1]**.



Push **[▲]** or **[▼]** to select the character.




Push **[D-OFF SET B]** or **[T-OFF ENT C]** to move the cursor.



Repeat previous steps.

Push **[MW CLR A]**.



## 5 MEMORY OPERATION

### Memory clearing


Contents of programmed memories can be cleared (blanked), if desired.

- 1 Push [V/MHz **SCAN**] to select VFO mode.
- 2 Push [**S.MW** **MW**] momentarily.
  - “M” indicator and the memory channel number blink.
- 3 Rotate [**DIAL**] to select the memory channel to be cleared.
  - Memory channels not yet programmed are blank.

- 4 Push [**S.MW** **MW**] momentarily, then push [**S.MW** **MW**] again for 1 sec.
  - **This operation must be performed within 1.5 sec.**
  - 3 beeps sound, then the frequency is cleared.
  - “M” indicator blinks continuously.
  - When clearing the call channel, the current VFO conditions are re-programmed into the call channel automatically.
- 5 Push any key, except [**S.MW** **MW**], to return to VFO mode.

**NOTE:** Be careful!— the contents of cleared memories CANNOT be recalled.


[EXAMPLE]: Clearing memory channel 20.

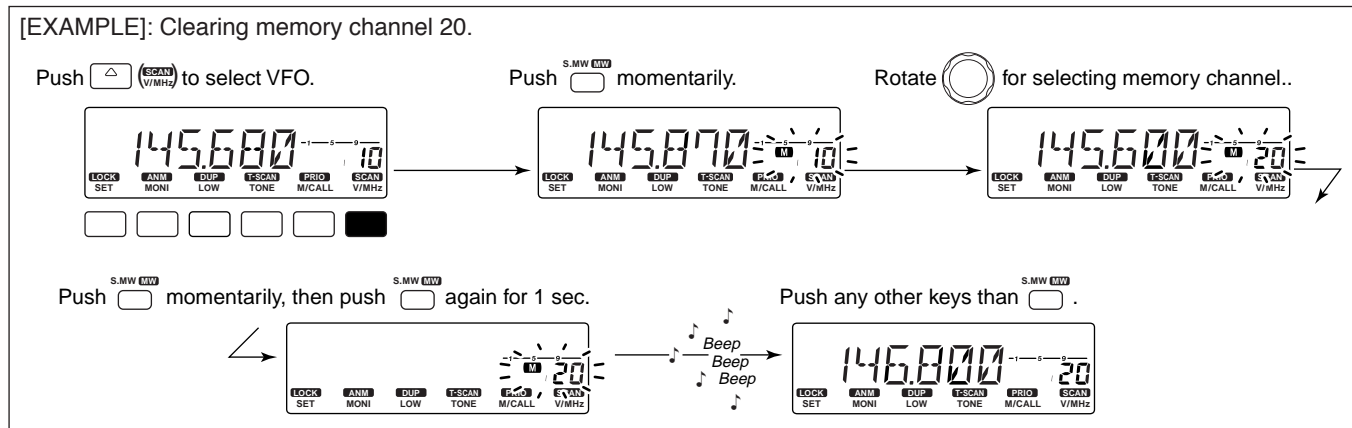

## ■ Memory bank selection

The IC-2200H has a total of 10 banks (A to J). Regular memory channels, 0 to 199, are assigned into the desired bank for easy memory management.

- ① Push **[M/CALL PRIO]** to select memory mode.
- ② Push **[BANK OPT]** to select memory bank condition.
  - Bank initial blinks

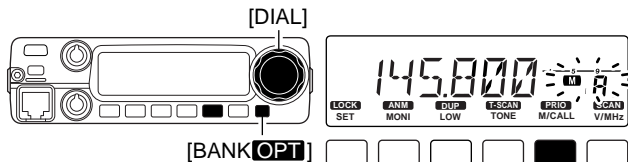


- ③ Rotate **[DIAL]** to select the desired bank, A to J.
  - Banks that have no programmed contents are skipped.
- ④ Push **[BANK OPT]** to set the bank.
  - Initial stops blinking.
- ⑤ Rotate **[DIAL]** to select the contents in the bank.
  - No channel numbers are displayed for memory bank operation.
- ⑥ To return to regular memory condition, push **[BANK OPT]** twice.




- ① Push **[MR/CALL]** to select memory mode.
- ② Push **[BANK/OPTION]** to select memory bank condition.
  - Bank initial blinks
- ③ Push **[▲]/[▼]** to select the desired bank, A to J.
  - Only programmed memory bank can be selected.
- ④ Push **[CLR A(MW)]** to set the bank.
  - Initial stops blinking.
- ⑤ Push **[▲]/[▼]** to select the desired contents in the bank.
  - No channel numbers are displayed for memory bank operation.
- ⑥ To return to regular memory condition, push **[BANK/OPTION]** then **[CLR A(MW)]**.

## Memory bank setting

- ① Push **[MR/CALL Prio]** to select memory mode, then select the desired memory channel via **[DIAL]**.
- ② Push **[SET LOCK]** enter the set mode.
- ③ Push **[SET]** or **[MONI]** several times until "BAK" appears.
  - "—" indication blinks as follows.

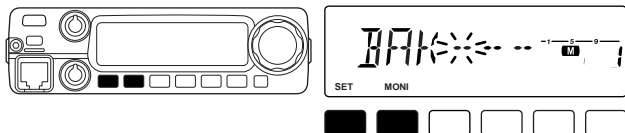

- ④ Rotate **[DIAL]** to select the desired bank to be set.

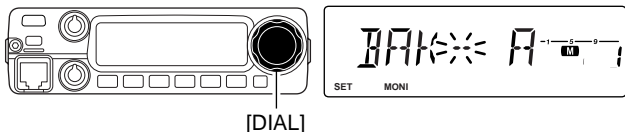

- ⑤ Push any key other than **[SET]** or **[MONI]** to set the channel into the bank and return to regular memory condition.
- ⑥ Repeat steps ① to ⑤ to set another memory channel into the same or another bank.




- ① Push **[MR/CALL]** then select the desired memory channel via **[▲]/[▼]** or keypad.
- ② Push **[SET B(D-OFF)]** to enter set mode.
- ③ Push **[SET B(D-OFF)]** or **[ENT C(T-OFF)]** several times until "BAK" appears.
- ④ Push **[▲]** or **[▼]** to select the desired bank to be set.
- ⑤ Push **[CLR A(MW)]** to set the channel into the bank and exit set mode.
- ⑥ Repeat steps ① to ⑤ to set an another memory channel into the same or another bank.

## ■ Transferring bank contents

Contents of programmed memory banks can be cleared or transferred to another bank.

**/// INFORMATION:** Even if the memory bank contents are cleared, the memory channel contents still remain programmed.

- ① Select the desired bank contents to be transferred or erased.
  - ➔ Push [**M/CALL** **PRIO**] to select memory mode.
  - ➔ Push [**BANK** **OPT**] then rotate [**DIAL**] to select the desired memory bank.
    - Bank initial blinks.
  - ➔ Push [**BANK** **OPT**] to select the bank then rotate [**DIAL**] to select the desired contents.
    - Bank initial stops blinking.
- ② Push [**SET** **LOCK**] enter the set mode.
- ③ Push [**SET**] or [**MONI**] several times until “BAK” appears.
  - Bank initial appears.

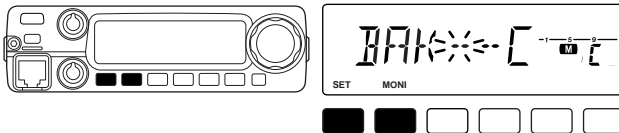

- ④ Rotate [**DIAL**] to select the desired bank initial to transfer or erase.
  - Select “--” indication when erasing the contents from the bank.
- ⑤ Push any key other than [**SET**] or [**MONI**] to transfer or erase. and return to regular memory condition.

- ⑥ Repeat steps ① to ⑤ for transferring or erasing an another banks contents.




- ① Select the desired bank contents to be transferred or erased.
  - ➔ Push [**MR/CALL**] to select memory mode.
  - ➔ Push [**BANK/OPTION**], then select the desired memory bank via [**▲**]/[**▼**].
  - ➔ Push [**CLR A(MW)**] to select the bank then select the desired contents via [**▲**]/[**▼**].
- ② Push [**SET B(D-OFF)**] to enter set mode.
- ③ Push [**SET B(D-OFF)**] or [**ENT C(T-OFF)**] several times until “BAK” appears.
- ④ Push [**▲**]/[**▼**] to select the desired bank initial to transfer or erase.
  - Select “-- --” indication when erasing the contents from the bank.
- ⑤ Push [**CLR A(MW)**] to set the bank and exit set mode.
- ⑥ Repeat steps ① to ⑤ for transferring or erasing an another banks contents.

# 6


## CALL CHANNEL OPERATION

### Call channel selection



➔ Push **[M/CALL PRIO]** once or twice to select the call channel.

- “C” appears instead of memory channel number indication.
- Push **[M/CALL PRIO]** to return to memory mode, or push **[V/MHz SCAN]** to select VFO mode.




- ➔ Push **[MR/CALL]** for 1 sec. to select the call channel.
- Push **[MR/CALL]** to select memory mode, or push **[VFO/LOCK]** to select VFO mode.

#### ✓ INFORMATION

Small “c” shows VFO was selected from the call channel.

When the VFO mode is selected from the call channel, a small “c” appears instead of memory channel number.



### Call channel transferring

- ➊ Push **[M/CALL PRIO]** several times to select the call channel.
  - “C” appears.
- ➋ Push **[S.MW MW]** momentarily, then rotate **[DIAL]** to select the memory channel to transfer the contents to.
  - “M” indicator and memory channel number blink.
  - To transfer to the VFO, push **[S.MW MW]** for 1 sec.
- ➌ Push **[S.MW MW]** for 1 sec. to transfer when a momentary push was used in the previous step.
  - If channel names have been programmed into the call channel, the names are also transferred.



- ➊ Push **[MR/CALL]** for 1 sec. to select the call channel.



- ➋ Push **[FUNC]**, **[CLR A(MW)]** momentarily, then push **[▲]/[▼]** to select the memory channel to transfer the contents to.
  - To transfer to the VFO, push **[FUNC]**, then push **[CLR A(MW)]** for 1 sec.



- ➌ Push **[FUNC]**, then **[CLR A(MW)]** for 1 sec. to transfer when a momentary push was used in the previous step.
  - If channel names have been programmed into the call channel, the names are also transferred.




## ■ Programming a call channel

Operating frequency, duplex information, subaudible tone information (tone encoder or tone squelch ON/OFF and its frequency) and alphanumeric channel names can also be programmed into the call channel.


- ① Set the desired frequency in VFO mode.
  - ➔ Push **[V/MHz SCAN]** to select VFO mode.
  - ➔ Set the frequency using **[DIAL]**.
  - ➔ Set other data as desired.
- ② Push **[S.MW MW]** momentarily.
- ③ Rotate **[DIAL]** to select the call channel
  - **"M"** indicator and "C" blink.

- ④ Push **[S.MW MW]** for 1 sec. to program.
  - 3 beeps sound and the unit returns to VFO mode automatically.


- 
- ① Set the desired frequency in VFO mode.
    - ➔ Push **[VFO/LOCK]** to select VFO mode.
    - ➔ Set the frequency.
    - ➔ Set other data as desired.
  - ② Push **[FUNC]**, then **[CLR A(MW)]** momentarily.
  - ③ Select the call channel via **[▲]** or **[▼]**.
  - ④ Push **[FUNC]** then **[CLR A(MW)]** for 1 sec. to program.
    - 3 beeps sound and the unit returns to VFO mode automatically.

**[EXAMPLE]:** Programming 145.120 MHz into the call channel via the microphone.


Push **[VFO/LOCK]** to select VFO mode.




Set the frequency.




Push **[FUNC]**, then **[MW CLR A]** momentarily.




Push **[▲]** until large "C" appears.



Push **[FUNC]** then **[MW CLR A]** for 1 sec. **■■■■**



Beep  
Beep  
Beep




## ■ Scan types

Scanning searches for signals automatically and makes it easier to locate new stations for contact or listening purposes.


There are 3 scan types and 4 resume conditions to suit your operating needs.

### FULL SCAN (p. 38)




Repeatedly scans all frequencies over the entire band. Used as the simplest scan without any preliminary settings necessary.

### PROGRAMMED SCAN (p. 38)




Repeatedly scans between two user-programmed frequencies. Used for checking for frequencies within a specified range such as repeater output frequencies, etc. 3 pairs of scan edges are available.

### MEMORY SCAN (p. 38)



Repeatedly scans memory channels except those set as skip channels. Used for often-called channels and for bypassing normally busy channels such as repeater frequencies.

### SCAN RESUME CONDITION (p. 42)



4 resume conditions are available: 3 timer scans and pause scan. When receiving a signal, pause scan pauses until the signal disappears; timer scans pause for 5, 10 or 15 sec.

**NOTE:** A tone scan function is available to search for subaudible tones (e.g. when you want to find a subaudible tone frequency necessary to open a repeater). See p. 51 for details.

## ■ Scan start/stop


### ◇ Preparation

Scan resume condition (p. 42); program the scan edges (pgs. 39, 40); program 2 or more memory channels (pgs. 25, 26); set skip settings, if desired (p. 41).

### ◇ Operation


- ① Select VFO mode for full/programmed scan with **[V/MHzSCAN]**; or memory mode for memory scan with **[M/CALLPRIO]**.
  - Select the desired bank with **[BANK/OPT]** for bank scan.
- ② Set the squelch to the point where noise is just muted.
- ③ Push **[V/MHzSCAN]** for 1 sec. to start the scan.
  - To change the scanning direction, rotate **[DIAL]**.
  - The memory channel readout blinks the scan type as follows:
- ④ Push **[SET LOCK]** to switch full and programmed scan (P1, P2 and P3).
- ⑤ To stop the scan, push **[SET LOCK]** or **[V/MHzSCAN]**.

#### • During full scan




Push **[LOCK SET]** to select full, band\* (A1, AA) or programmed scan (P1, P2 and P3) in sequence. (\*Depends on versions)  
 A1 : FM band (136–174 MHz)  
 AA : AM band (118–136 MHz)

#### • During programmed scan




Indicates scan edge channels.  
 • P1 stands for 1A/1b  
 • P1 to P3 are available when they are programmed, and switches with **[LOCK SET]**.

#### • During memory scan



When AM and FM frequencies are programmed into memory channels in a disorderly fashion, memory scanning is very slow because it takes a lot of time to change Modes.  
 To increase memory scanning, assign AM and FM frequencies into separate banks respectively and use Bank Scan.

#### • During Bank scan



- ① Push **[VFO/LOCK]** to select VFO mode for full/programmed scan; push **[MR/CALL]** to select memory mode for memory scan.
  - Push **[BANK/OPTION]** to select a bank for bank scan.
- ② Set the squelch to the point where noise is just muted.
- ③ Push **[SCAN 2(T-SCAN)]** to start the scan.
  - Push **[▲]** or **[▼]** for 1 sec. also starts the scan.
- ④ Push **[set B(D-OFF)]** to switch full and programmed scan (P1, P2 and P3).
- ⑤ To stop the scan push **[SCAN 2(T-SCAN)]** or **[CLR A(MW)]**.


## ■ Scan edges programming

Scan edges can be programmed in the same manner as memory channels. Scan edges are programmed into scan edges, 1A/1b to 3A/3b, in memory channels.

- ① Set the edge frequency of the desired frequency range in VFO mode:
  - ➔ Set the frequency using [DIAL].
  - ➔ Set other data (e.g. repeater settings, etc.) if desired.
- ② Push [S.MW **MW**] momentarily.
  - "M" indicator and channel number blink.
- ③ Rotate [DIAL] to select one of scan edge channel, 1A, 2A or 3A.

- ④ Push [S.MW **MW**] for 1 sec. to program.
  - 3 beeps sound and VFO is automatically selected.
  - Scan edge 1b, 2b or 3b is automatically selected when continuing to push [S.MW **MW**] after programming.
- ⑤ To program a frequency for the other pair of scan edges, 1b, 2b or 3b, repeat steps ① and ④.
  - If the same frequency is programmed into a pair of scan edges, programmed scan will not function.

[EXAMPLE]: Programming 145.300 MHz into scan edges 1A.

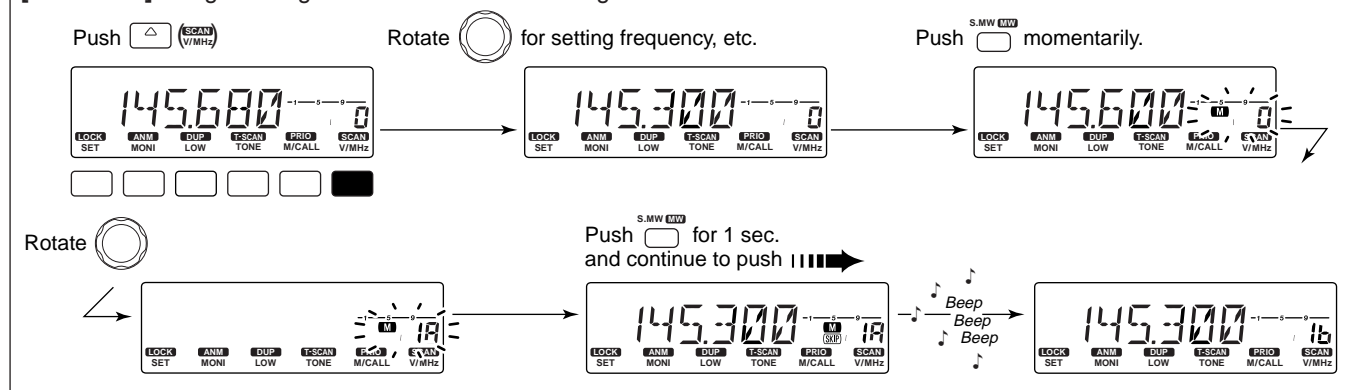


◇ Programming scan edges via microphone



- 1 Set the desired frequency in VFO mode.
  - ➔ Push [VFO/LOCK] to select VFO mode.
  - ➔ Set the frequency via the keypad or [▲]/[▼].
- 2 Push [FUNC] then [CLR A(MW)] momentarily.
- 3 Push [▲] or [▼] to select scan edge channels, 1A, 2A or 3A.
- 4 Push [FUNC], then push [CLR A(MW)] for 1 sec. to program.
  - 3 beeps sound and VFO is automatically selected.
  - Memory channel number advances to the next scan edge channel, 1b, 2b or 3b, when continuing to push [CLR A(MW)] after programming.


- 5 To program a frequency for the other scan edge channels, repeat steps 1 to 4.

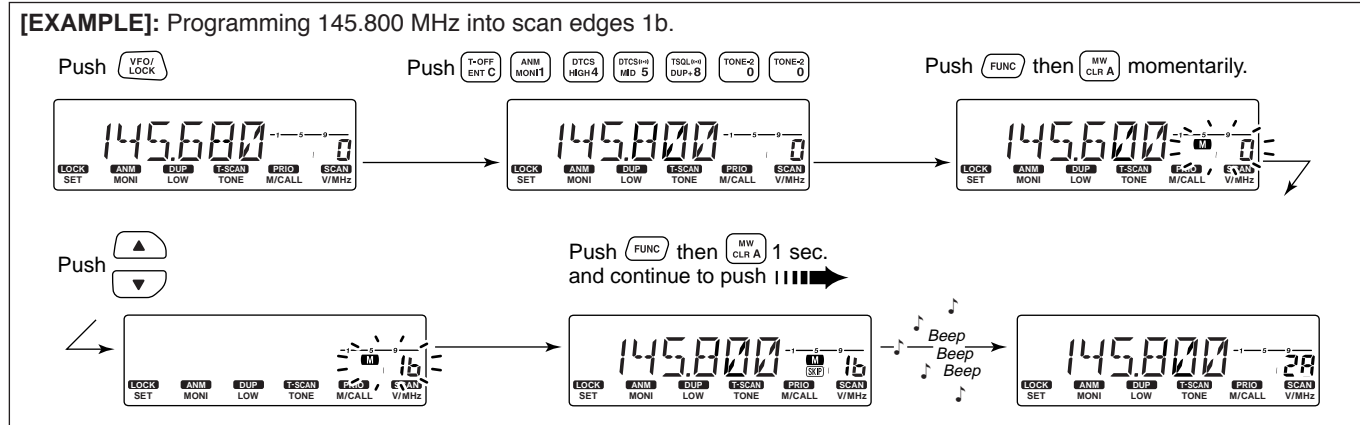

## ■ Skip channel setting

USING SET MODE

The memory skip function speeds up scanning by checking only those memory channels not set as skip channels. Set skip channels as follows.

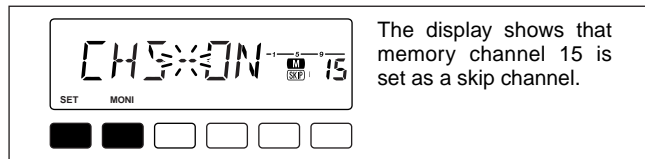

- ① Select a memory channel:
  - ➔ Push **[M/CALL PRIO]** to select memory mode.
  - ➔ Rotate **[DIAL]** to select the desired channel to be a skip channel.
- ② Push **[SET LOCK]** to enter set mode.
- ③ Push **[SET]** or **[MONI]** several times until “CHS” appears as shown above.
- ④ Rotate **[DIAL]** to turn the skip function ON or OFF for the selected channel.
  - “**SKIP**” appears : The channel is skipped during scan. (CHS-ON)
  - “**SKIP**” disappears : The channel is scanned during scan. (CHS-OFF)
- ⑤ Push any key other than **[SET]** or **[MONI]** to exit set mode.



- ① Select a memory channel.
  - ➔ Select memory mode by pushing **[MR/CALL]**.
  - ➔ Push **[▲]** or **[▼]** to select the desired channel to be a skip channel.
- ② Push **[SET B(D-OFF)]** to enter set mode.
- ③ Push **[SET B(D-OFF)]** or **[ENT C(T-OFF)]** several times until “CHS” appears as shown at left.
- ④ Push **[▲]** or **[▼]** to set or cancel the skip setting.
  - See item ④ at left for skip indicator details.
- ⑤ Push **[CLR A(MW)]** to exit set mode.


### NOTES:

Even though scan edge channels cannot be set as skip channels, they ARE skipped during memory scan.

SET mode cannot be accessed when memory names are displayed. To set the scan resume condition, return to frequency indication by pushing **[MONI ANM]** on the front panel for 1 sec., or push **[FUNC]** then **[MONI 1(ANM)]** (HM-133V) to cancel the channel name indication, then set as described on this page.

## ■ Scan resume condition

The scan resume condition can be selected as timer or pause scan. The selected resume condition is also used for priority watch. (p. 44)

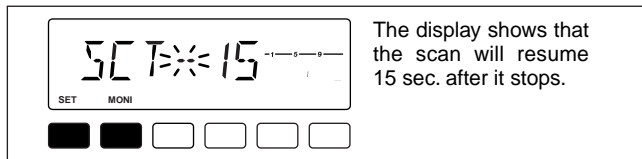

- ① Push **[SET LOCK]** to enter set mode.
- ② Push **[SET]** or **[MONI]** several times until “SCT” or “SCP” appears as shown above.
  - When “d” is displayed in place of the 100 MHz digit, cancel the DTMF memory encoder in advance. (p. 46)
- ③ Rotate **[DIAL]** to set the desired timer:
  - “SCT-15” : Scan pauses 15 sec. while receiving a signal.
  - “SCT-10” : Scan pauses 10 sec. while receiving a signal.
  - “SCT-5” : Scan pauses 5 sec. while receiving a signal.
  - “SCP-2” : Scan pauses until the signal disappears and then resumes 2 sec. later.
- ④ Push any keys than **[SET]** or **[MONI]** to exit set mode.



- ① Push **[SET B(D-OFF)]** to enter set mode.
- ② Push **[SET B(D-OFF)]** or **[ENT C(T-OFF)]** several times until “SCT” or “SCP” appears as shown at left.
- ③ Push **[▲]** or **[▼]** to select the scan resume condition.
  - See item ③ at left for scan resume condition details.
- ④ Push **[CLR A(MW)]** to exit set mode.

### NOTE:

Set mode cannot be accessed when memory names are displayed. To set the scan resume condition, return to frequency indication by pushing **[MONI ANM]** on the front panel for 1 sec., or push **[FUNC]** then **[MONI 1(ANM)]** (HM-133V) to cancel the channel name indication, then set as described on this page.

## Priority watch types


The transceiver has 3 priority watch types to suit your needs. You can transmit on the VFO frequency while the priority watch operates.

The watch resumes according to the selected scan resume condition. See previous page for details.

**NOTE:** If the pocket beep function is activated, the transceiver automatically selects the tone squelch function when priority watch starts.

### MEMORY CHANNEL WATCH


While operating on a VFO frequency, priority watch checks for a signal on the selected memory channel every 5 sec.



### MEMORY SCAN WATCH


While operating on a VFO frequency, priority watch checks for signals on each memory channel in sequence.

- The memory skip function is useful to speed up the scan.



### CALL CHANNEL WATCH


While operating on a VFO frequency, priority watch checks for signals on the call channel every 5 sec.





## ■ Priority watch operation

- ① Select VFO mode; then, set an operating frequency.
- ② Set the watching channel(s).
  - For memory channel watch:**  
Select the desired memory channel.
  - For memory scan watch:**  
Select memory mode; then, push [V/MHz] **SCAN** for 1 sec. to start memory scan.
  - For call channel watch:**  
Select the call channel by pushing [M/CALL] **PRIO** once or twice.
- ③ Push [M/CALL] **PRIO** for 1 sec. to start the watch.
  - The transceiver checks the memory or call channel every 5 sec.
  - The watch resumes according to the selected scan resume condition. (p. 42)
  - While the watch is pausing, pushing [M/CALL] **PRIO** resumes the watch manually.
- ④ Push [M/CALL] **PRIO** to stop the watch.



While pausing or receiving a signal on the memory or call channel, "PRIO" blinks.



- ① Select VFO mode; then, set an operating frequency.
- ② Set the watching channel(s).
  - For memory channel watch:**  
Push [MR/CALL] then [▲] or [▼] to select the desired memory channel.
  - For memory scan watch:**  
Push [MR/CALL], then push [SCAN 2] to start the memory scan.
  - For call channel watch:**  
Push [MR/CALL] for 1 sec. to select the call channel.
- ③ Push [PRIO 3(PTT-M)] to start the watch.
  - The transceiver checks the memory or call channel every 5 sec.
  - The watch resumes according to the selected scan resume condition. (p. 42)
  - To resume the watch manually when paused, push [PRIO 3(PTT-M)] or [CLR A(MW)].
- ④ To stop the watch, push [CLR A(MW)].

## ■ Programming a DTMF code


DTMF codes are used for autopatching, controlling other equipment, etc. The transceiver has 16 DTMF memory channels (d0–dF) for storage of often-used DTMF codes of up to 24 digits.


- ① Push **[BANK OPT]** for 1 sec. to enter the DTMF setting.
- ② Rotate **[DIAL]** to turn the DTMF encoder ON.
- ③ Push **[SET]** or **[MONI]** to enter the DTMF programming condition.
  - Push **[V/MHz]** to return to the DTMF setting.
- ④ Rotate **[DIAL]** to select the desired DTMF memory channel.
  - The DTMF memory channel indication blinks.


- ⑤ Push **[SET]** or **[MONI]**.
  - The first digit blinks.
- ⑥ Rotate **[DIAL]** to select the desired code.
- ⑦ Push **[MONI]** to select the next digit.
  - Push **[SET]** to move the cursor backward.
- ⑧ Repeat the steps ⑥ and ⑦ to set the desired DTMF tone sequence.
  - The S/R/F indicator shows the digit group. The indication increases every 6 digit.
- ⑨ Push **[V/MHz]**, then push any key other than indicated function keys to exit DTMF memory programming condition.

**[EXAMPLE]:** Programming “5428AB453” into DTMF memory channel “d4.”


Push  **BANK OPT** for 1 sec.




Rotate  to turn the DTMF encoder ON.




Push  (SET) or  (MONI).




Rotate .




Push  (SET) then rotate .



Repeat the previous step until the desired code is entered.



Push  (V/MHz), then any other keys than indicated function keys.



## ■ Transmitting a DTMF code

### ◇ Automatic transmission (DTMF memory)



- 1 Push **[FUNC]** then **[Low 6(DTMF)]** to turn the DTMF memory encoder ON.
  - “d” appears in place of the 100 MHz digit.
- 2 Push **[BANK/OPTION]** for 1 sec. then **[SET B(D-OFF)]** to enter the DTMF memory programming condition.
- 3 Push **[▲]** or **[▼]** to select the desired channel.
- 4 Push **[PTT]** to transmit the selected memory.
  - Exit the programming condition automatically.
  - Each push of **[PTT]** transmits the DTMF code.
- 5 Push **[FUNC]** then **[SET B(D-OFF)]** to cancel the DTMF memory encoder.
  - When the DTMF encoder is turned ON continuously, each push of the PTT transmits the previously selected DTMF code.

### ◇ Transmitting a DTMF memory directly



- 1 Push **[FUNC]** then **[Low 6(DTMF)]** to turn the DTMF memory encoder ON.
  - “d” appears in place of the 100 MHz digit.
- 2 Push **[DTMF-S]** to turn the DTMF memory direct selection ON.
  - The function indicator (microphone) lights green.
- 3 Push the desired DTMF channel number.
  - “0” to “9” are available for channel numbers.
  - The selected DTMF code is automatically transmitted without pushing PTT.

### Transmitting a DTMF memory directly— continued



**NOTE:** When no DTMF code programmed channel number is pushed, it transmits previously transmitted DTMF memory code.

- 4 Push **[DTMF-S]** again to deactivate the DTMF memory direct selection.
- 5 Push **[FUNC]** then **[SET B(D-OFF)]** to cancel the DTMF memory encoder.

### ◇ Manual transmission




- 1 Deactivate the DTMF memory encoder by pushing **[FUNC]** then **[SET B(D-OFF)]**.
- 2 Push **[DTMF-S]** to turn the DTMF direct selection ON.
  - The function indicator (microphone) lights green.
- 3 Push one of “A” to “F” keys momentarily, then push the desired DTMF keys, 0–9 and A to F.
  - A: **[CLR A(MW)]**      B: **[SET B(D-OFF)]**,
  - C: **[ENT C(T-OFF)]**    D: **[SQL▲ D(MUTE)]**,
  - E: **[\*(TONE-1)]**      F: **[SQL▼ #(16KEY-L)]**
  - Automatically transmits without pushing PTT.
  - The first code, one of “A” to “F,” is not transmitted. DTMF code transmission starts from the 2nd code.
- 4 Push **[DTMF-S]** again to deactivate the DTMF direct selection.

## 9 DTMF MEMORY ENCODER

### ■ DTMF speed

USING INITIAL SET MODE

The rate at which DTMF memories send individual DTMF characters can be set to accommodate operating needs.

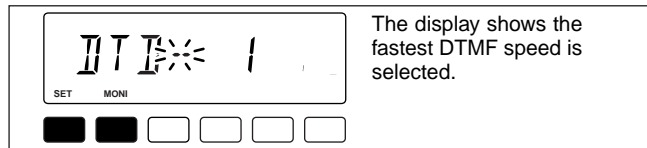

- ① Push **[PWR]** for 1 sec. to turn power OFF.
- ② While pushing **[SET LOCK]**, push **[PWR]** for 1 sec. to turn power ON and enter initial set mode.
- ③ Push **[SET]** or **[MONI]** several times until “DTD” appears as shown above.
- ④ Rotate **[DIAL]** to select the desired speed as shown in the table below.
- ⑤ Push **[PWR]** to exit initial set mode.

DISPLAY	INTERVAL	SPEED
DTD-- 1	100 msec.	5.0 cps
DTD-- 2	200 msec.	2.5 cps
DTD-- 3	300 msec.	1.6 cps
DTD-- 5	500 msec.	1.0 cps


cps=characters/sec

## ■ Pocket beep operation

This function uses subaudible tones for calling and can be used as a “common pager” to inform you that someone has called while you were away from the transceiver.

### ◇ Waiting for a call from a specific station

- ① Set the operating frequency.
- ② Push **[SET LOCK]** to enter set mode.
- ③ Push **[SET]** or **[MONI]** several times until “Ct” for tone squelch or “dt” for DTCS squelch appears.




Tone squelch frequency setting



DTCS code setting




- ④ Rotate **[DIAL]** to select the desired tone squelch frequency or DTCS code.
- ⑤ When operating the pocket beep function with DTCS squelch, push **[SET]** once then rotate **[DIAL]** to select the DTCS polarity.



DTCS polarity setting

- ⑥ Push any key other than **[SET]** or **[MONI]** to exit set mode.

- ⑦ Push **[TONE T-SCAN]** several times until “” or “” are displayed to turn ON the pocket beep with tone squelch or DTCS squelch, respectively.



Appears when the pocket beep with tone squelch is activated.

Appears when the pocket beep with DTCS squelch is activated.

- ⑧ When a signal with the matched tone is received, the transceiver emits beep tones and blinks “.”
  - Beep tones sound for 30 sec. and “” blinks. To stop the beeps and blinking manually, push any key. When the beep tones are not stopped manually, “” continues flashing until step ⑨ is operated.
- ⑨ Push **[PTT]** to answer.
  - “” disappears and cancels the pocket beep function automatically.
- ⑩ Push **[TONE T-SCAN]** several times until “” or “” disappears to cancel the tone squelch or DTCS squelch function.

# 10 POCKET BEEP AND TONE SQUELCH

## Waiting for a call from a specific station—continued



- 1 Set the operating frequency.
- 2 Program the CTCSS tone frequency or DTCS code in set mode.



- ➔ Push **[SET B(D-OFF)]** to enter set mode.
  - ➔ Push **[SET B(D-OFF)]** or **[ENT C(T-OFF)]** several times until “Ct” for tone squelch or “dt” for DTCS squelch appears.
    - “**▷**” blinks when tone squelch (“Ct”), or “**Ⓞ**” blinks when DTCS squelch (“dt”) is selected.
  - ➔ Push **[▲]/[▼]** to select the desired tone frequency or DTCS code.
  - ➔ Push **[SET B(D-OFF)]** to select “DTP” then push **[▲]/[▼]** to select the DTCS polarity.
  - ➔ Push **[CLR A(MW)]** to exit set mode.
- 3 Push **[FUNC]** then push **[DUP+ 8(TSQL ((•)))]** or **[MID 5(DTCS ((•)))]** to turn ON the pocket beep with tone squelch or DTCS squelch, respectively.
  - 4 When a signal with the matched tone is received, the transceiver emits beep tones for 30 sec. and blinks “**Ⓜ.**”
  - 5 Push **[PTT]** to answer or push **[CLR A(MW)]** to stop the beeps and flashing.
    - “**Ⓜ.**” disappears and cancels the pocket beep function automatically.
  - 6 To cancel the tone squelch or DTCS squelch function, push **[FUNC]** then **[ENT C(T-OFF)]**.
    - “**▷**” or “**Ⓞ**” disappears

## ◆ Available tone frequency list

67.0	79.7	94.8	110.9	131.8	156.7	171.3	186.2	203.5	229.1
69.3	82.5	97.4	114.8	136.5	159.8	173.8	189.9	206.5	233.6
71.9	85.4	100.0	118.8	141.3	162.2	177.3	192.8	210.7	241.8
74.4	88.5	103.5	123.0	146.2	165.5	179.9	196.6	218.1	250.3
77.0	91.5	107.2	127.3	151.4	167.9	183.5	199.5	225.7	254.1

/// **NOTE:** The transceiver has 50 tone frequencies and consequently their spacing is narrow compared to units having 38 tones. Therefore, some tone frequencies may receive interference from adjacent tone frequencies.

/// To prevent interference from adjacent tone frequencies, using the frequencies as in the following table, is recommended.

### • Recommended tone frequencies

67.0	77.0	88.5	100.0	114.8	131.8	151.4	173.8	203.5	233.6
69.3	79.7	91.5	103.5	118.8	136.5	156.7	179.9	210.7	241.8
71.9	82.5	94.8	107.2	123.0	141.3	162.2	186.2	218.1	250.3
74.4	85.4	97.4	110.9	127.3	146.2	167.9	192.8	225.7	

## ◆ Calling a waiting station using pocket beep

A subaudible tone matched with the station’s CTCSS tone frequency or 3-digit DTCS code with polarity is necessary. Use the tone squelch on the next page or a subaudible tone encoder (pgs. 19, 50)

## ■ Tone/DTCS squelch operation

The tone or DTCS squelch opens only when receiving a signal with the same pre-programmed subaudible tone or DTCS code, respectively.

- ① Set the operating frequency.
- ② Program the CTCSS tone frequency or DTCS code in set mode.
  - See p. 48 for programming details.
- ③ Push **[TONE T-SCAN]** several times until “▷” or “Ⓞ” appears in the function display.
  - “▷” for tone squelch; “Ⓞ” for DTCS squelch operation.
- ④ When a signal with the matched tone is received, the squelch opens and the signal can be heard.
  - When the received signal includes an unmatched tone, the squelch does not open. However, the S/RF indicator shows the received signal strength.
  - To open the squelch manually, push **[MONI ANM]**.
- ⑤ Operate the transceiver in the normal way (push **[PTT]** to transmit; release **[PTT]** to receive).
- ⑥ To cancel the tone squelch, push **[TONE T-SCAN]** several times until “▷” or “Ⓞ” disappears.







- ① Set the operating frequency.
- ② Program the CTCSS tone frequency or DTCS code in set mode.
  - See p. 49 for programming details.
- ③ Push **[FUNC]** then **[SIMP 9(TSQL)]** or **[HIGH 4(DTCS)]** to turn the tone squelch or DTCS squelch ON.
- ④ When a signal with the matched tone is received, the squelch opens and the signal can be heard.
  - When the received signal includes an unmatched tone, the squelch does not open. However, the S/RF indicator shows the received signal strength.
  - To open the squelch manually, push **[MONI 1(ANM)]**.
- ⑤ Operate the transceiver in the normal way (push **[PTT]** to transmit; release **[PTT]** to receive).
- ⑥ To cancel the tone squelch, push **[FUNC]** then **[ENT C(T-OFF)]**.
  - “▷” or “Ⓞ” disappears

# 10 POCKET BEEP AND TONE SQUELCH

## ■ Tone scan

By monitoring a signal that is being operated with pocket beep, tone or DTCS squelch function, you can determine the tone frequency or DTCS code necessary to open a squelch.

- ① Set the channel to be checked for a tone frequency or code.
- ② Push **[TONE T-SCAN]** several times to select the tone condition or type to be scanned.
  - One of “♪,” “♯” or “Ⓚ” appears
- ③ Push **[TONE T-SCAN]** for 1 sec. to start the tone scan.
  - To change the scanning direction, rotate **[DIAL]**.



During CTCSS tone scan

During DTCS code scan

**NOTE:** The decoded tone frequency is programmed temporarily when a memory or call channel is selected. However, this will be cleared when the memory/call channel is re-selected.

- ④ When the CTCSS tone frequency or 3-digit DTCS code is matched, the squelch opens and the tone frequency is temporarily programmed into the selected condition such as memory or call channel.
  - The tone scan pauses when a CTCSS tone frequency or 3-digit DTCS code is detected.
  - The decoded CTCSS tone frequency or 3-digit DTCS code is used for the tone encoder or tone encoder/decoder depending on the selected tone condition or type in step ②.
    - No indication : Cannot be used for operation.
    - “♪” : CTCSS tone encoder
    - “♯” : CTCSS tone encoder/decoder
    - “Ⓚ” : DTCS tone encoder/decoder
- ⑤ Push **[V/MHz SCAN]** to stop the scan.




- ① Set the channel to be checked for a tone frequency.
- ② Selects the tone condition or type to be scanned.
  - Push **[FUNC]** then push; **[DUP-7(TONE)]** for repeater tone; **[SIMP 9(TSQL)]** for tone squelch; **[HIGH 4(DTCS)]** for DTCS squelch.
- ③ Push **[FUNC]** then **[SCAN 2(T-SCAN)]** to start the tone scan.
- ④ When the tone frequency is matched, the squelch opens and the tone frequency is programmed into the selected mode such as memory or call channel.
- ⑤ Push **[CLR A(MW)]** to stop the scan.



## ■ Pager function

This function uses DTMF codes for paging and can be used as a “message pager” to inform you of a caller’s identification even when you leave the transceiver temporarily unattended.

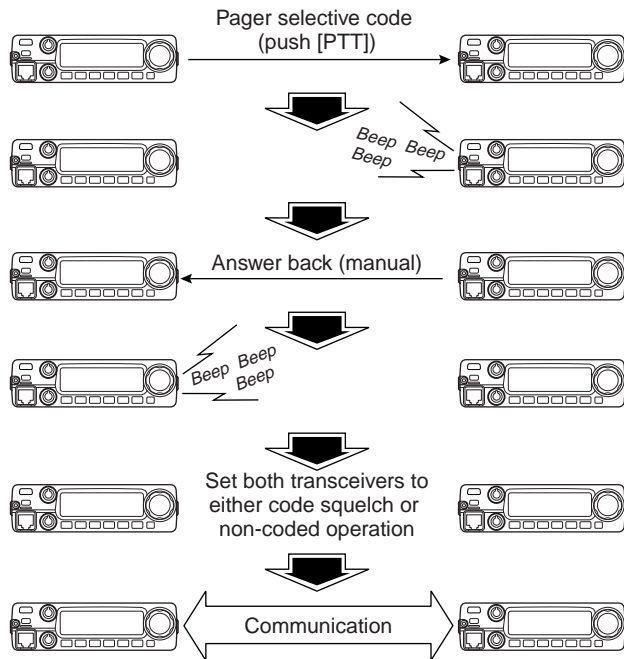

## ■ Code programming

### ◇ Before programming

The pager and code squelch functions require ID codes and a group code. These codes are 3-digit DTMF codes and must be written into the code channels before operation.

- ① Decide the ID code of each transceiver and a group code for your group.
- ② Decide whether you want to return to normal operation or code squelch operation after a connection is made.
- ③ Program the ID code, group code and transmit codes (other station’s codes) as below.

### ◇ Code channel assignment

ID OR GROUP CODE	CODE CHANNEL NUMBER	“RECEIVE ACCEPT” OR “RECEIVE INHIBIT”
Your ID code	0	“Receive accept” only
Other parties’ ID code	1–6	“Receive inhibit” should be programmed in each channel.
Group code	One of 1–6	“Receive accept” must be programmed.
Memory space*	P	“Receive inhibit” only.


\*Channel CP automatically memorizes an ID code when receiving a pager call. The contents in channel CP cannot be changed manually.

# 11 PAGER/CODE SQUELCH

## ◆ Code programming

An ID code **MUST** be programmed into code channel C0. Up to 6 transmit codes are programmable into code channels, C1 to C6, if required.

- 1 Push **[BANK OPT]** for 1 sec. then rotate **[DIAL]** to turn Pager mode ON.
  - “PG” appears.




- 2 Push **[SET]** or **[MONI]**.
  - One of either “CP” or “C0” to “C6” flashes.
  - “C0” is the ID code and “C1” to “C6” are transmit codes.
- 3 Rotate **[DIAL]** to select code channel C0.
  - A different ID code must be programmed into each transceiver.




- 4 Push **[MONI]** (or **[SET]**) to set into code programming condition.
  - The 1st digit blinks and “C0” indication stops blinking.
- 5 Rotate **[DIAL]** to set the desired code.

- 6 Push **[MONI]** (or **[SET]**) to select 2nd digit, then rotate **[DIAL]** to set the desired code.
  - 2nd digit blinks (1st digit stop blinking).
  - Repeat this step for 3rd digit programming.



- 7 Push **[MONI]** (or **[SET]**) to program the ID code.
  - Long beep sounds and the “C0” indication blinks.
- 8 Rotate **[DIAL]** to select a transmit code channel from “C1” to “C6.”
- 9 Repeat steps 4 to 7 to set transmit code channel.
- 10 Push **[S.MW MW]** to set the channel for “receive inhibit” or “receive accept.”
  - When “receive inhibit” is set, “SKIP” appears as follows.
  - Code channel C0 cannot be set as “receive inhibit.”
  - See p. 54 for “receive accept” and “receive inhibit” details.



Appears when “receive inhibit” is set to the code channel.

- 11 Push any key other than indicated function keys to exit code set mode.



- 1 Push **[BANK/OPTION]** for 1 sec. then push **[▲]** or **[▼]** to turn Pager mode ON.
- 2 Push **[SET B(D-OFF)]** to enter to the code set mode.
  - One of either “CP” or “C0” to “C6” blinks.
  - “C0” is the ID code and “C1” to “C6” are the transmit code.
- 3 Push **[▲]** or **[▼]** to select the desired code channel.
- 4 Enter the desired 3-digit code via the keypad.
- 5 Push **[SET B(D-OFF)]** to set the channel for “receive inhibit” or “receive accept.”
  - When “receive inhibit” is set, “SKIP” appears.
  - Code channel C0 cannot be set as “receive inhibit.”
  - See right above for “receive accept” and “receive inhibit” details.
- 6 Repeat steps 3 to 5 to set additional code channels, if desired.
- 7 Push **[CLR A(MW)]** to exit code set mode.

#### • Receive accept/receive inhibit

- “Receive accept” (“SKIP” indicator does not appear) accepts pager calls when the transceiver receives a signal with a code the same as that in the code channel.
- “Receive inhibit” (“SKIP” indicator appears) rejects calls even when the transceiver receives a code the same as that in the code channel. Transmit codes should therefore be programmed for “receive inhibit,” otherwise the transceiver will not reject unnecessary calls.


#### • Pager/code squelch operation during channel indication

To use these functions in channel indication, the pager/code squelch setting must be programmed with other memory contents before selecting channel number indication.

## ■ Pager operation

### ◇ Calling a specific station

- ① Program the desired code channel in advance (p. 53).
- ② Set the operating frequency.
  - Set the [VOL] and [SQL] to the desired level as in normal operation.
- ③ Push **[BANK/OPT]** for 1 sec. then rotate **[DIAL]** to turn Pager mode ON.
- ④ Select the desired transmit code channel:
  - Push **[SET]** or **[MONI]**.
  - Rotate **[DIAL]** to select the code channel.
  - Push any key other than indicated function keys to return to the pager operating condition.
    - 100 MHz digit shows "P."



- ⑤ Push **[PTT]** to transmit the pager code.
  - Transmits the selected transmit codes and your ID automatically.
- ⑥ Wait for an answer back.
  - When the transceiver receives an answer back code, the function display shows the other member's ID or group code.
- ⑦ After confirming a connection, push **[BANK/OPT]** for 1 sec. then turn the **[DIAL]** to select the code squelch operation, or repeat the previous key operation again to select non-selective calling system.
- ⑧ Communicate with the other party as normal: push **[PTT]** to transmit; release to receive.



- ① Program the desired code channel in advance (p. 54).
- ② Set the operating frequency.
- ③ Push **[BANK/OPTION]** for 1 sec. then push **[▲]/[▼]** to turn Pager mode ON.
- ④ Select the desired transmit code channel:
  - Push **[SET B(D-OFF)]**.
  - Push **[▲]/[▼]** to select the code channel.
  - Push **[CLR A(MW)]** to return to the pager operating condition.
- ⑤ Push **[PTT]** to transmit the pager code.
- ⑥ Wait for an answer back.
  - When the transceiver receives an answer back code, the function display shows the other member's ID or group code.
- ⑦ After confirming a connection, push **[BANK/OPTION]** for 1 sec. then push **[▲]/[▼]** to select the code squelch operation, or repeat the previous key operation again to select non-selective calling system.
- ⑧ Communicate with the other party as normal: push **[PTT]** to transmit; release to receive.

### ◇ Waiting for a call from a specific station

- ① Set the operating frequency.
- ② Push **[BANK/OPT]** for 1 sec then rotate **[DIAL]** to turn Pager mode ON.
  - 100 MHz digit shows “P.”
- ③ Wait for a call.
  - When receiving a call, the caller’s ID or group code appears as shown at right.
- ④ Push **[PTT]** to send an answer back call and display the operating frequency.
- ⑤ After confirming a connection, push **[BANK/OPT]** for 1 sec. then rotate **[DIAL]** to select code squelch operation, or repeat the previous key operation again to select non-selective calling system.



- ① Set the operating frequency.
- ② Push **[BANK/OPTION]** for 1 sec. then push **[▲]/[▼]** to turn Pager mode ON.
  - 100 MHz digit shows “P.”
- ③ Wait for a call.
  - When receiving a call, the caller’s ID or group code appears as shown at right.
  - DO NOT push any digit keys while code channels C0 to C6 are displayed, or code channel contents will be changed.
- ④ Push **[PTT]** to send an answer back call and display the operating frequency.
- ⑤ After confirming a connection, push **[BANK/OPTION]** for 1 sec. to select code squelch operation, or repeat the previous key operation again to select non-selective calling system.

### • PERSONAL CALLS



CP and blink.


This display appears when you are called with your ID code and the calling station’s ID code is 424.

### • GROUP CALLS



This display appears when you are called with the group code, 888, and 888 has been programmed into code channel C6.

### • ERROR INFORMATION




Previously received code.

When the transceiver receives an incomplete signal, “E” and previously received code appear.

## ■ Code squelch

Code squelch provides communications with quiet standby since you will only receive calls from stations which know your ID or group code. Each push of **[PTT]** sends a 3-digit code in order to open the receiving station's code squelch prior to voice transmission.

- ① Set the operating frequency.
  - Set the AF and squelch to the desired level as in normal operation.
- ② Push **[BANK/OPT]** for 1 sec. then rotate **[DIAL]** to select code squelch mode.
  - “CS” appears.
- ③ Select the desired transmit code channel:
  - ➔ Push **[SET]** or **[MONI]**.
  - ➔ Rotate **[DIAL]** to select the code channel.
  - ➔ Push any other keys than indicated function keys to exit code set mode.
    - 100 MHz digit shows “C.”



- ④ Operate the transceiver in the normal way (push **[PTT]** to transmit; release **[PTT]** to receive).
- ⑤ To cancel the code squelch, push **[BANK/OPT]** for 1 sec. then rotate **[DIAL]**.
  - 100 MHz digit shows “1” when the function is cancelled.



- ① Set the operating frequency.
- ② Push **[BANK/OPTION]** for 1 sec. then push **[▲]/[▼]** to select code squelch mode.
  - “CS” appears.
- ③ Select the desired transmit code channel:
  - ➔ Push **[SET]** or **[MONI]**.
  - ➔ Push **[▲]/[▼]**.
  - ➔ Push **[CLR A(MW)]** to return to previous condition.
- ④ Communicate with the other party as normal: push **[PTT]** to transmit; release to receive.
- ⑤ To cancel the code squelch, push **[BANK/OPTION]** for 1 sec then rotate **[DIAL]**.

## ■ Digital mode operation

The IC-2200H with optional digital unit UT-118 can be operated for digital voice mode and slow data operation for both transmit and receive. Also available for connecting GPS receiver (compatible with an RS-232C output/NMEA format/4800 bps) and transmit/receive position data.

/// **NOTE:** Digital mode operation **MUST** be set AM/FM mode selection to “FM” and Wide/Narrow setting to “Wide” in set mode. (pgs. 74, 78)


## ■ Call sign programming

4 kind of call sign memories are available for your own call sign “MYC,” other station call sign “YUC” and nearest repeater call sign “R1C” and another zone’s repeater call sign “R2C.” Each call sign memory can be stored up to 6 call signs, and each call sign programmed up to 8 characters.

### ◇ Your call sign programming

Your call sign must be programmed for both Digital voice and slow data communications (including GPS transmission).


- ① Push [**BANK OPT**] for 1 sec. then push [**BANK OPT**] or [**V/MHz**] several times to select the call sign select mode.
  - “MYC” appears.



- ② Rotate [**DIAL**] to select the desired call sign channel then push [**SET**] or [**MONI**].



- ③ Push [**MONI**] (or [**SET**]) to set into call sign programming condition.
  - The 1st digit blinks and channel indication stops blinking.
- ④ Rotate [**DIAL**] to set the desired character or code.
  - Push [**MONI**] or [**SET**] to move the cursor to left or right, respectively.
- ⑤ Push [**MONI**] (or [**SET**]) to select 2nd digit, then rotate [**DIAL**] to set the desired character or code.
  - 2nd digit blinks (1st digit stop blinking).
  - Repeat this step for programming your call sign.



- ⑥ Push [**V/MHz**] to fix the call sign.
- ⑦ Rotate [**DIAL**] to select an another channel from “C1” to “C6.”
- ⑧ Repeat steps ② to ⑥ to program your call sign channels.

## 12 DIGITAL MODE OPERATION

### Your call sign programming—continued




BANK/OPTION

- 1 Push **[BANK/OPTION]** for 1 sec. then push **[BANK/OPTION]** or **[MR/CALL]** to select the call sign select mode.
  - “MYC” appears.
- 2 Push **[▲]** or **[▼]** to select the desired call sign channel then push **[SET B(D-OFF)]**.
- 3 Push **[SET B(D-OFF)]** to set into call sign programming mode.
  - The 1st digit blinks and channel indication stops blinking.
- 4 Push **[▲]** or **[▼]** to set the desired character or code.
  - Push **[SET B(D-OFF)]** or **[ENT C(T-OFF)]** to move the cursor to left or right, respectively.
- 5 Push **[SET B(D-OFF)]** or **[ENT C(T-OFF)]** to select 2nd digit, then push **[▲]** or **[▼]** to set the desired character or code.
  - 2nd digit blinks (1st digit stops blinking).
  - Repeat this step for programming your call sign.
- 6 Push **[CLR A(MW)]** to fix the call sign and exit programming condition.

### ◆ Station/Repeater1/2 call sign programming

Station call sign must be programmed for the specified station call as well as repeater operation in both Digital voice and slow data communications.

- 1 Push **[BANK OPT]** for 1 sec. then push **[BANK OPT]** or **[V/MHz]** several times to select the call sign select mode.
  - “YUC” appears for station call sign.
  - “R1C” or “R2C” appears for repeater call sign.



- 2 Rotate **[DIAL]** to select the desired call sign channel then push **[SET]** or **[MONI]**.



- 3 Push **[MONI]** (or **[SET]**) to set into call sign programming condition.
  - The 1st digit blinks and channel indication stops blinking.
- 4 Rotate **[DIAL]** to set the desired character or code.
  - Push **[MONI]** or **[SET]** to move the cursor to left or right, respectively.



- ⑤ Push **[MONI]** (or **[SET]**) to select 2nd digit, then rotate **[DIAL]** to set the desired character or code.
- 2nd digit blinks (1st digit stop blinking).
  - Repeat this step for programming station/repeater call sign.



- ⑥ Push **[V/MHz]** to fix the call sign.
- ⑦ Rotate **[DIAL]** to select an another channel from “C1” to “C6.”
- ⑧ Repeat steps ② to ⑥ to program another station/repeater call sign channels.


✓ **For your information:**

Station and/or repeater call sign can be programmed from Received call record when a call is received.  
See page 64 for details.

✓ **For your information:**

Repeater call sign can be programmed gateway connection capabilities at step ④ for connecting to the other Area or Zone.

- “G” appears or disappears at the 8th digit when each pushing **[LOW]**.



- ① Push **[BANK/OPTION]** for 1 sec. then push **[BANK/OPTION]** or **[MR/CALL]** to select the call sign select mode.
- “YUC” appears for station call sign.
  - “R1C” or “R2C” appears for repeater call sign.
- ② Push **[▲]** or **[▼]** to select the desired call sign channel then push **[SET B(D-OFF)]**.
- ③ Push **[SET B(D-OFF)]** to set into call sign programming mode.
- The 1st digit blinks and channel indication stops blinking.
- ④ Push **[▲]** or **[▼]** to set the desired character or code.
- Push **[SET B(D-OFF)]** or **[ENT C(T-OFF)]** to move the cursor to left or right, respectively.
- ⑤ Push **[SET B(D-OFF)]** or **[ENT C(T-OFF)]** to select 2nd digit, then push **[▲]** or **[▼]** to set the desired character or code.
- 2nd digit blinks (1st digit stops blinking).
  - Repeat this step for programming your call sign.
- ⑥ Push **[CLR A(MW)]** to fix the call sign and exit programming condition.

NOTE: The digital repeater for an amateur radio operation is not available at present of December 2003. It will be designed in the future.

## 12 DIGITAL MODE OPERATION

### ■ Digital voice mode operation

- ① Set the desired frequency in VFO mode. (pgs. 9, 10)
  - Select output power, if desired. (p.15)
- ② Push **[BANK/OPT]** for 1 sec. then push **[BANK/OPT]** or **[V/MHz]** several times to select the digital select mode.
  - “DG” appears.
- ③ Rotate **[DIAL]** to turn the digital mode ON.



- ④ Push **[BANK/OPT]** to select the your call sign select mode.
  - “MYC” appears.
- ⑤ Rotate **[DIAL]** to select the desired your call sign channel, if you have programmed several call signs.



- ① Set the desired frequency in VFO mode.
  - Select output power, if desired. (p.15)
- ② Push **[BANK/OPTION]** for 1 sec. then push **[BANK/OPTION]** or **[MR/CALL]** to select the digital select mode.
  - “DG” appears.
- ③ Push **[▲]** to turn the digital mode ON.
- ④ Push **[BANK/OPTION]** to select the your call sign select mode.
  - “MYC” appears.
- ⑤ Push **[▲]** or **[▼]** to select the desired your call sign channel, if you have programmed several call signs.

### ◆ When sending a CQ

- ⑥ Select “CQ” as the call sign.
  - Push **[BANK/OPT]** twice to select the call sign select mode.
    - “YUC” appears.
  - Rotate **[DIAL]** to select the desired channel then push **[SET]** or **[MONI]**.
  - Push **[S.MW/MW]** for 1 sec. to edit “CQCQCQ.”




- ⑥ Select “CQ” as the call sign.
  - Push **[BANK/OPTION]** twice to select the call sign select mode.
    - “YUC” appears.
  - Push **[▲]** or **[▼]** to select the desired channel then push **[SET B(D-OFF)]** or **[ENT C(T-OFF)]**.
  - Push **[FUNC]** then **[CLR A(MW)]** for 1 sec. to edit “CQCQCQ.”

## ◆ When calling the desired station

- ⑥ Select the desired call sign.
- Push [**BANK OPT**] twice to select the call sign select mode.
    - “YUC” appears.
  - Rotate [**DIAL**] to select the desired call sign (pre-programmed), or set the desired call sign. (see pgs. 59, 60)



- Push any key other than indicated function keys to exit option set mode.



- ⑦ Push and hold [**PTT**] to transmit and speak into the microphone at normal voice level.
- Transmit indicator appears and the RF meter shows the output power.
- ⑧ Release [**PTT**] to return to receive.
- The other station call sign will be received.
  - Received call signs can be stored into the received call record automatically. See page 63 for details.

**NOTE:** The digital mode operation is vastly different than FM mode. One of the differences is in the digital mode the squelch does not function as FM mode, changing the squelch setting will not open to hear the hiss of “White Noise,” only activate for digital squelch function as CSQL (Digital code squelch), DSQL (Call sign squelch) or S-meter squelch.



- ⑥ Select the desired call sign.
- Push [**BANK/OPTION**] twice to select the call sign select mode.
    - “YUC” appears.
  - Push [**▲**] or [**▼**] to select the desired call sign (pre-programmed), or set the desired call sign. (see p. 60)
  - Push [**CLR A(MW)**] to exit option set mode.
- ⑦ Push and hold [**PTT**] to transmit and speak into the microphone at normal voice level.
- Transmit indicator appears and the RF meter shows the output power.
- ⑧ Release [**PTT**] to return to receive.
- The other station call sign will be received.
  - Received call signs can be stored into the received call record automatically. See page 63 for details.

## 12 DIGITAL MODE OPERATION


### ■ When receiving a Digital call

When an individual station call is received, the calling station call sign can be stored into the received call record.


The record is cleared once turning power OFF.

#### ◇ Received call record

- ① Push **[BANK/OPT]** for 1 sec. then push **[BANK/OPT]** or **[V/MHz]** several times to select the received call indication.
  - “RXCALL,” “R1CALL,” and “R2CALL” are available for the received station call sign, repeater 1/2 call signs, respectively.




- ② To confirm the received call, push **[SET]** or **[MONI]** to enter the received call sign indication mode.




- ① Push **[BANK/OPTION]** for 1 sec. then push **[BANK/OPTION]** or **[MR/CALL]** to select the received call indication.
  - “RXCALL,” “R1CALL,” and “R2CALL” are available for the received station call sign, repeater 1/2 call signs, respectively.
- ② To confirm the received call, push **[SET B(D-OFF)]** or **[ENT C(T-OFF)]** to enter the received call sign indication mode.

## ◆ To reply a call


- Push **[BANK/OPT]** or **[V/MHz]** several times to select the call sign select mode.
  - “YUC” appears for station call sign.
  - “R1C” or “R2C” appears for repeater call sign.



- Rotate **[DIAL]** to select the blank channel or erasable channel.



- Push **[BANK/OPT]** three times to select the received call indication.
- To confirm the received call, push **[SET]** or **[MONI]** to enter the received call sign indication mode.



- Push **[S.MW/MW]** for 1 sec. to store the call sign into the selected station call sign channel.
- Push and hold **[PTT]** to reply a call.





- Push **[BANK/OPTION]** or **[MR/CALL]** to select the call sign select mode.
  - “YUC” appears for station call sign.
  - “R1C” or “R2C” appears for repeater call sign.
- Push **[▲]** or **[▼]** to select the blank channel or erasable channel.
- Push **[BANK/OPTION]** three times to select the received call indication.
- To confirm the received call, push **[SET B(D-OFF)]** or **[ENT C(T-OFF)]** to enter the received call sign indication mode.
- Push **[FUNC]** then **[CLR A(MW)]** for 1 sec. to store the call sign into the selected station call sign channel.
- Push and hold **[PTT]** to reply a call.

## 12 DIGITAL MODE OPERATION

### ■ Break-in communication

The break-in function allows a user to break into a conversation, where the two original stations are communicating with call sign squelch enabled. The breaking station should enter the call sign of one of the stations that they wish to communicate with. When you call the desired station, only the selected station will hear the call. With the break-in function enabled, both stations will be able to hear the call.

- ① While receiving another station's transmissions, push **[BANK OPT]** for 1 sec. to enter the options set mode.
- ② Push **[BANK OPT]** or **[V/MHz]** several times to select the station call sign item, "YUC." Next enter one of the stations call signs in the "YUC."
  - If the stations are using a local repeater, enter the repeater call sign in "R1C." Or if the stations are using a remote repeater, enter the repeater call sign into "R2C."
- ③ Push **[BANK OPT]** or **[V/MHz]** several times to select the Break-in item.
  - "BRK--OF" appears.
- ④ Rotate **[DIAL]** to turn the break-in setting ON.
  - "BRK--ON" appears.



- ⑤ When both stations are in standby, transmit to send a break-in call.
- ⑥ Wait for the reply call from the station who receive the break-in call.
- ⑦ After you receive the reply, communicate in a normal way.
- ⑧ To cancel the break-in, push **[BANK OPT]** for 1 sec., then rotate **[DIAL]** to turn OFF.

#### **About the call sign squelch** (p.67)

Icom's call sign squelch function opens when;

- your own call sign "MYC" (p.58) is called.
- the station breaking in calls with the break-in function enabled, and the called station and breaking station both have the same call sign of the other station set "YUC" (p.59).

BANK/OPTION



- 1 While receiving an another station's transmissions, push **[BANK/OPTION]** for 1 sec. to enter the option set mode, then set the either station/repeater call sign into "MYC," "YUC," "R1C" and "R2C."
- 2 Push **[BANK/OPTION]** or **[MR/CALL]** several times to select the station call sign item, "YUC." Next enter one of the stations call signs in the "YUC."
  - If the stations are using a repeater, enter the correct call sign, in the repeater call sign items, "R1C" or "R2C," as well.
- 3 Push **[BANK/OPTION]** or **[MR/CALL]** several times to select the break-in item.
  - "BRK--OF" appears.
- 4 Push **[▲]** or **[▼]** to turn the break-in setting ON.
  - "BRK--ON" appears.
- 5 When both stations are in standby, transmit to send a break-in call.
- 6 Wait for the reply call from the station who receives the break-in call.
- 7 After you receive the reply, communicate in a normal way.
- 8 To cancel the break-in, push **[BANK/OPTION]** for 1 sec., then push **[▲]** or **[▼]** to turn OFF.

## EMG communication

The EMG communication mode is available for Digital modes operation. In the EMG call, no call sign setting is necessary.

- ① Set the desired frequency then push **[BANK/OPT]** for 1 sec. to enter the option set mode.
- ② Push **[BANK/OPT]** or **[V/MHz]** several times to select the EMG item.
  - "EMG--OF" appears.
- ③ Rotate **[DIAL]** to turn the EMG setting ON.
  - "EMG--ON" appears.



- ④ Operate the transceiver in a normal way.
- ⑤ To cancel the EMG communication mode, push **[BANK/OPT]** for 1 sec., then rotate **[DIAL]** to turn OFF.

BANK/OPTION



- 1 Set the desired frequency then **[BANK/OPTION]** for 1 sec. to enter the option set mode.
- 2 Push **[BANK/OPTION]** or **[MR/CALL]** several times to select the EMG item.
  - "EMG--OF" appears.
- 3 Push **[▲]** or **[▼]** to select the EMG setting ON.
  - "EMG--ON" appears.
- 4 Operate the transceiver in a normal way.
- 5 To cancel the EMG communication mode, push **[BANK/OPTION]** for 1 sec., then push **[▲]** or **[▼]** to turn OFF.

### ■ Digital code/Call sign squelch operation


The digital code (CSQL) or call sign (DSQL) squelch opens only when receiving a voice signal with the same pre-programmed digital code or call sign, respectively. The digital code or call sign squelch does not function while in a slow data communication.

- ① Set the operating frequency.
- ② Program the digital code or call sign in setting mode.
  - See p. 69, “Digital code setting” or pgs. 59, 60 “Call sign programming.”
- ③ Push **[TONE T-SCAN]** several times until “**▷**” or “**◻**” appears in the function display.
  - “**▷**” for digital code squelch; “**◻**” for call sign squelch operation.
- ④ When a signal with the matched digital code/call sign is received, the squelch opens and the signal can be heard.
  - When the received signal includes an unmatched digital code/call sign, the squelch does not open. However, the S/Rf indicator shows the received signal strength.
  - To open the squelch manually, rotate **[SQL]** counter clockwise.
- ⑤ Operate the transceiver in the normal way (push **[PTT]** to transmit; release **[PTT]** to receive).
- ⑥ To cancel the digital code/call sign squelch, push **[TONE T-SCAN]** several times until “**▷**” or “**◻**” disappears.

**NOTE:** While in the digital mode operation, the monitor function (pushing **[MONI ANM]**) works as the analog monitor for receiving an FM signal. The digital monitor function is activate using the Squelch control knob **[SQL]**.



- ① Set the operating frequency.
- ② Program the digital code or call sign in setting mode.
  - See p. 69, “Digital code setting” or pgs. 59, 60 “Call sign programming.”
- ③ Push **[FUNC]** then **[SIMP 9(TSQL)]** or **[HIGH 4(DTCS)]** to turn the digital code or call sign squelch ON.
- ④ When a signal with the matched digital code or call sign is received, the squelch opens and the signal can be heard.
  - When the received signal includes an unmatched digital code or call sign, the squelch does not open. However, the S/Rf indicator shows the received signal strength.
  - To open the squelch manually, push **[SQL ▼ # (16KEY-L)]** several times until less than squelch level 7.



- ⑤ Operate the transceiver in the normal way (push **[PTT]** to transmit; release **[PTT]** to receive).
- ⑥ To cancel the digital code or call sign squelch, push **[FUNC]** then **[ENT C(T-OFF)]**.
  - “**▷**” or “**◻**” disappears.

#### ✓ While scanning in digital mode:


- The call sign squelch function deactivate, then after cancelling the scan it will activate again.
- Scan stops near channel in a 5 kHz tuning steps, and then no sound comes out.



## ■ Slow data communication

In addition to the digital voice communication, a slow data communication is available (Refer p. 5 about the transceiver-PC connection details).

- ① Set the desired frequency.
- ② Set another settings, such as repeater call, transmit output power.
- ③ Push **[BANK OPT]** for 1 sec. then push **[BANK OPT]** or **[V/MHz]** several times to select the automatic data transmission setting. (see p. 69)
  - “ATX” appears.
  - Skip this setting, if you want to transmit manually.



- ④ Push **[BANK OPT]** once to select the data communication speed setting. (see p. 70)
  - “SPD” appears.
  - Select suitable data speed for your PC or application.



- ⑤ Start up the slow data communication application.
- ⑥ Set the application as follows.
  - Port : The same COM port number as IC-2200H's
  - Baud rate : 4800 bps or 9600 bps (same as step ④)
  - Data : 8 bit
  - Parity : None
  - Stop : 1 bit
  - Flow control : Xon/Xoff
- ⑦ Transceiver automatically transmits or receive the data when you sending data to transceiver. Or push and hold **[PTT]** to transmit, release to receive the data manually.
  - Refer to the instruction of the application that how to send or receive data.



- ① Set the desired frequency.
- ② Set another settings, such as repeater call, transmit output power.
- ③ Push **[BANK/OPTION]** for 1 sec. then push **[BANK/OPTION]** or **[MR/CALL]** to select the automatic transmission setting.
  - “ATX” appears.
  - Skip this setting, if you want to transmit manually.
- ④ Push **[BANK/OPTION]** to select the data communication speed.
  - “SPD” appears.
  - Select suitable data speed for your PC or application.
- ⑤ Start up the slow data communication application, then follow step ⑥ at above.

## 12 DIGITAL MODE OPERATION

### ■ Other setting items

- ① Push [**BANK** **OPT**] for 1 sec. then push [**BANK** **OPT**] or [**V/MHz**] several times to select the desired item.
- ② Rotate [**DIAL**] to select the desired value or condition.


BANK/OPTION



- ① Push [**BANK/OPTION**] for 1 sec. then push [**BANK/OPTION**] or [**MR/CALL**] several times to select the desired item.
- ② Push [**▲**] or [**▼**] to select the desired value or condition.

### ◇ Auto Reply

During Digital mode operation, auto reply function is available. This function replies to an individual station call even you are away from the transceiver. (default: OFF)  
After the manual transmission (pushing [PTT]), the Auto Reply setting is return to OFF automatically.





### ◇ Digital Code

Sets the desired digital code for digital code squelch operation. Total of 100 codes (00–99) are available. (default: 00)



### ◇ Auto data Transmission

During slow data operation, auto data transmission function is available. This function transmits when data are input from PC via the [DATA] jack. (default: OFF)  
After the manual transmission (pushing [PTT]), the Auto Transmission setting is return to OFF automatically.



### ◆ Data Speed

Select the communication speed between the transceiver and PC from 4800 baud or 9600 baud.

(default: 9600)



### ◆ Standby Beep

Turns the beep emission capability when the communicating station finishes transmitting or the receive signal disappears.

(default: OFF)



### ◆ Auto RxCall Write

When an individual station call is received, the calling station call sign can be stored automatically. The stored call sign can be re-called when selecting a station call sign.

(default: OFF)



### ◆ Auto Rx RepeaterCall Write

When an individual station call via the repeater is received, the repeater call sign can be stored automatically. The stored repeater's call sign can be re-called when selecting a repeater call sign.

(default: OFF)



## 12 DIGITAL MODE OPERATION

### ◇ Message Transmission

Select the Message transmission function ON and OFF. When ON is selected, transceiver transmits a text message (pre-programmed).


(default: OFF)

After the manual transmission (pushing [PTT]), the Message Transmission setting is return to OFF automatically.



### ◇ TX message

TX messages are available up to 6 channels and each channel can be programmed up to 20 characters message. Available characters are **0** to **9**, **A** to **Z** (capital letters only), some symbols and space. (shown at right table)



### ◇ TX message programming

A TX message channel C1 must be programmed, if you want to use the GPS message. The GPS message is transmitted from channel C1 only.

- ① Push **[MONI]** (or **[SET]**) to edit for 1 sec. then rotate **[DIAL]** to select the message channel.
  - One of either "C1" to "C6" flashes.
- ② Push **[MONI]** (or **[SET]**) to set into message programming condition.
  - The 1st digit blinks and channel indication stops blinking.
- ③ Rotate **[DIAL]** to set the desired character.
- ④ Push **[MONI]** (or **[SET]**) to select 2nd digit, then rotate **[DIAL]** to set the desired character.
  - 2nd digit blinks (1st digit stop blinking).
  - Repeat this step for programming.
- ⑤ Push **[V/MHz]** to set the message.
- ⑥ Repeat steps ② to ⑤ to set another message channels.
- ⑦ Push any key other than indicated function keys to exit the option set mode.


(space)	( )	" (")	# (#)	\$ (\$)	% (%)	& (&)	' (')	( ( (	) ( )	* (*)
+ (+)	, (,)	-- (-)	\ (.)	/ (/)	0 (0)	1 (1)	2 (2)	3 (3)	4 (4)	5 (5)
6 (6)	7 (7)	8 (8)	9 (9)	: (:)	; (;)	< (<)	= (=)	> (>)	? (?)	@ (@)
A (A)	B (B)	C (C)	D (D)	E (E)	F (F)	G (G)	H (H)	I (I)	J (J)	K (K)
L (L)	M (M)	N (N)	O (O)	P (P)	Q (Q)	R (R)	S (S)	T (T)	U (U)	V (V)
W (W)	X (X)	Y (Y)	Z (Z)	[ ( [	\ ( \)	] ( ]	^ (^)			

## ■ GPS operation


A GPS receiver (RS-232C output/NMEA format/4800 bps) can be connected to [DATA] socket of the IC-2200H to indicate the current position (Latitude and Longitude). The position data can also be transmitted with a message to another station.

### ◆ Position indication

- ① While connecting a GPS receiver, push **[BANK OPT]** for 1 sec. to enter the option set mode.
- ② Push **[BANK OPT]** or **[V/MHz]** several times to select the GPS setting.
  - “GPS” appears.



- ③ Rotate **[DIAL]** to set the suitable sentence formatter for the connecting GPS receiver.




### • Sentence formatters

1	GLL	6	GLL, GGA	11	GGA, GSA	16	GLL, GGA, RMC	21	GLL, GSA, VTG
2	GGA	7	GLL, RMC	12	GGA, VTG	17	GLL, GGA, GSA	22	GGA, RMC, GSA
3	RMC	8	GLL, GSA	13	RMC, GSA	18	GLL, GGA, VTG	23	GGA, RMC, VTG
4	GSA	9	GLL, VTG	14	RMC, VTG	19	GLL, RMC, GSA	24	GGA, GSA, VTG
5	VTG	10	GGA, RMC	15	GSA, VTG	20	GLL, RMC, VTG	25	RMC, GSA, VTG

- ④ Push **[BANK OPT]** twice to select the position indication.



- ⑤ Push **[MONI]** (or **[SET]**) to enter the position indication.
  - Latitude and longitude data appear in order as below.

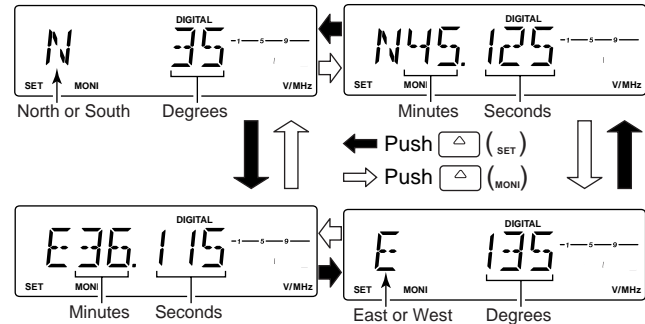


- ⑥ After checking the current position, push any key other than indicated function keys to return to normal operating mode.

**IMPORTANT:** When set the sentence formatter at step ③ for connecting GPS receiver, and already programmed your call sign, GPS automatic transmission is activate every 3 minutes. The automatic transmission can be changed interval time or deactivated, if desired. (see next page)


## 12 DIGITAL MODE OPERATION

### ◆ GPS Automatic transmission

- ① While connecting a GPS receiver, push **[BANK OPT]** for 1 sec. to enter the option set mode.
- ② Push **[BANK OPT]** or **[V/MHz]** several times to select the GPS automatic transmission.
  - “GTX” appears.



- ③ Rotate **[DIAL]** to set the interval time for the GPS automatic transmission.
  - Interval time is selectable from 0.5 (30 sec.), 1, 3, 5, 10, 30 min.




- ④ Push **[SET]** or **[MONI]** several times to edit transmit message, if desired. (see page 71)
  - When TX message channel “C1” is programmed, GPS transmission automatically transmits TX message “C1.”
- ⑤ Push any key other than indicated function keys to exit option set mode.

**IMPORTANT:** GPS Automatic transmission transmits at every setting interval even while receiving an another stations communication. To prevent interfere the another stations, set the GPS transmission together with the Repeater lockout item “RLO” (set to “BU” busy lockout) in initial set mode. (p. 84)

### ◆ Receiving a GPS transmission

- ① Push **[BANK OPT]** for 1 sec. to enter the option set mode.
- ② Push **[BANK OPT]** or **[V/MHz]** several times to select the received position.
  - “RX POS” appears.



- ③ Push **[MONI]** (or **[MONI]**) to enter the position indication.
  - Latitude data and longitude data appear alternately.
- ④ Push **[BANK OPT]** twice to select the received GPS message.
- ⑤ Push **[MONI]** (or **[SET]**) to enter the message.
  - Received message is indicated, push **[MONI]** or **[SET]** to move the cursor to left or right, respectively.
- ⑥ After checking a received position and message, push any key other than indicated function keys to return to normal operating mode.

## ■ Set mode

### • Set mode operation

- ① Push [SET LOCK] to enter the set mode.
- ② Push [SET] or [MONI] to select the desired item.
- ③ Rotate [DIAL] to select the condition or value.
- ④ Push any key other than [SET] or [MONI] to exit set mode.



- ① Push [SET B(D-OFF)] to enter set mode.
- ② Push [SET B(D-OFF)] or [ENT C(T-OFF)] to select the desired item.
- ③ Push [▲] or [▼] to select the condition or value.
- ④ Push [CLR A(MW)] to exit set mode.

### • Set mode items


<p>• Display dimmer</p> <p>DIM -- 4</p> <p>↓ ↑</p> <p>• Display color</p> <p>COL -- AM</p>	<p>• Repeater tone frequency</p> <p>88.5</p> <p>• Tone squelch frequency</p> <p>88.5</p>	<p>• DTCS code</p> <p>023</p> <p>• DTCS polarity</p> <p>I TP -- NN</p>
<p>• Weather alert*</p> <p>ALT -- OF</p> <p>• AM/FM mode select*</p> <p>A / F -- FM</p>	<p>→ : Push  (SET) (front panel); or  (microphone)</p> <p>→ : Push  (MONI) (front panel); or  (microphone)</p> <p>*Available for USA version only.</p> <p>†Appears when accessing set mode from VFO mode only.</p> <p>‡Appears when accessing set mode from memory mode only.</p>	<p>• Offset frequency</p> <p>± 0600</p> <p>• Reverse mode</p> <p>REV -- OF</p>
<p>• Wide/Nar. setting*</p> <p>W / N -- W</p> <p>• Bank link function†</p> <p>BLK -- OF</p> <p>• Bank setting†</p> <p>BAK -- -- -- --</p>	<p>• Channel skip setting†</p> <p>CHS -- OF</p> <p>• Transmit permission</p> <p>TX -- ON</p>	<p>• Tuning step</p> <p>TS -- 5</p> <p>• Scan resume timer</p> <p>SCT -- 15</p>

## 13 OTHER FUNCTIONS

### ◆ Display dimmer


Adjust to suit lighting conditions.

The levels 1 (dark) to 4 (bright: default) are available.



### ◆ Display color

The display color can be set to amber (default) or green.




Amber setting (default)

Green setting

### ◆ Repeater tone

Sets subaudible tone frequency (encoder only) for repeater operation. Total of 50 tone frequencies (67.0–254.1 Hz) are available. (default: 88.5 Hz)



### ◆ Tone squelch tone

Sets subaudible tone frequency (both encoder and decoder) for tone squelch operation. Total of 50 tone frequencies (67.0–254.1 Hz) are available. (default: 88.5 Hz)



#### • Available subaudible tone frequencies

67.0	79.7	94.8	110.9	131.8	156.7	171.3	186.2	203.5	229.1
69.3	82.5	97.4	114.8	136.5	159.8	173.8	189.9	206.5	233.6
71.9	85.4	100.0	118.8	141.3	162.2	177.3	192.8	210.7	241.8
74.4	88.5	103.5	123.0	146.2	165.5	179.9	196.6	218.1	250.3
77.0	91.5	107.2	127.3	151.4	167.9	183.5	199.5	225.7	254.1


### ◆ DTCS code and polarity

Sets DTCS code (both encoder and decoder) for DTCS squelch operation. Total of 104 codes are available. (default: 023)



### ◆ DTCS polarity


Sets DTCS polarity for transmission and reception from “NN,” “NR,” “RN,” “RR.” (default: NN)






### ◆ Offset frequency

Sets the duplex offset frequency within 0 to 20 MHz range. During duplex (repeater) operation, transmit frequency (or receive when reverse function is set to ON) shifts the set frequency. (default value may differ depending on versions)



### ◆ Reverse mode

Sets the reverse function ON and OFF (default).




Reverse function OFF (default)

Reverse function ON

### ◆ Tuning step



Selects tuning step from 5 (default), 10, 12.5, 15, 20, 25, 30 and 50 kHz for [DIAL] or [▲]/[▼] operation.



### ◆ Scan resume timer


Selects scan resume timer from SCT-15 (default), SCT-10, SCT-5 and SCP-2.

- SCT-15/10/5 : Scan pauses for 15/10/5 sec., then resumes.
- SCP-2 : Pause on a signal until signal disappears, then resumes 2 sec. after the signal disappears.




### ◆ Transmit permission

Turns transmission permission ON and OFF. This function can be set for each memory, call channel and VFO, independently.



Transmission is permitted.  
(default)




Transmission is inhibited.

## 13 OTHER FUNCTIONS


### ◇ Channel skip setting

Sets channel skip setting from ON and OFF for memory skip scan operation.

This item appears when set mode is accessed from memory mode only.



Scans the memory channel.  
(does not skip; default)





Does not scan the memory channel (skips).

### ◇ Memory bank setting

Sets the desired memory bank (A to J and OFF) to assign the regular memory channels.



This item appears when set mode is accessed from memory mode only.



### ◇ Memory bank link function


Sets the memory bank link function ON and OFF (default). The link function provides continuous banks scan, that scans all contents in the selected banks during bank scan.

This item appears when set mode is accessed from memory mode only.



#### • Bank link setting

- ① Rotate **[DIAL]** to select the memory bank link function ON.
- ② Push **[SET]** or **[MONI]** to select the desired bank to be linked.
  - BLA: Bank A, BLB: Bank B, BLC: Bank C, BLD: Bank D, BLE: Bank E, BLF: Bank F, BLG: Bank G, BLH: Bank H, BLI: Bank I, BLJ: Bank J



- ③ Rotate **[DIAL]** to select "ON" to linking the bank.
- ④ Repeat steps ② and ③ to set the link condition.

### ◇ Wide/Narrow setting

Sets both the transmission and reception passband width from wide and narrow.

When narrow is set, the transmission deviation and reception passband width become half of the wide setting (approx.).

This setting can be set for each memory, call and VFO independently.

/// **NOTE:** This item **MUST** be set "W" (WIDE) when operating the digital mode.



Wide setting (default)




Narrow setting


### ◇ AM/FM mode selection

Sets the operating mode for receiving from AM or FM mode (default).

/// **NOTE:** This item **MUST** be set "FM" when operating the digital mode.



FM mode selection (default)



AM mode selection


### ◇ Weather alert function

*U.S.A. versions only*

Turns weather alert function ON and OFF.



Weather alert OFF (default)



Weather alert ON

## ■ Initial set mode


The initial set mode is accessed at power ON and allows you to set seldom-changed settings. In this way, you can “customize” transceiver operations to suit your preference and operating style.

AT POWER ON

### ◇ Entering initial set mode


- ① While pushing **[SET LOCK]**, push **[PWR]** for 1 sec. to enter initial set mode.
- ② Push **[SET]** or **[MONI]** to select the desired item.
- ③ Rotate **[DIAL]** to select the condition or value.
- ④ Push **[PWR]** to exit initial set mode.

### • Initial set mode items

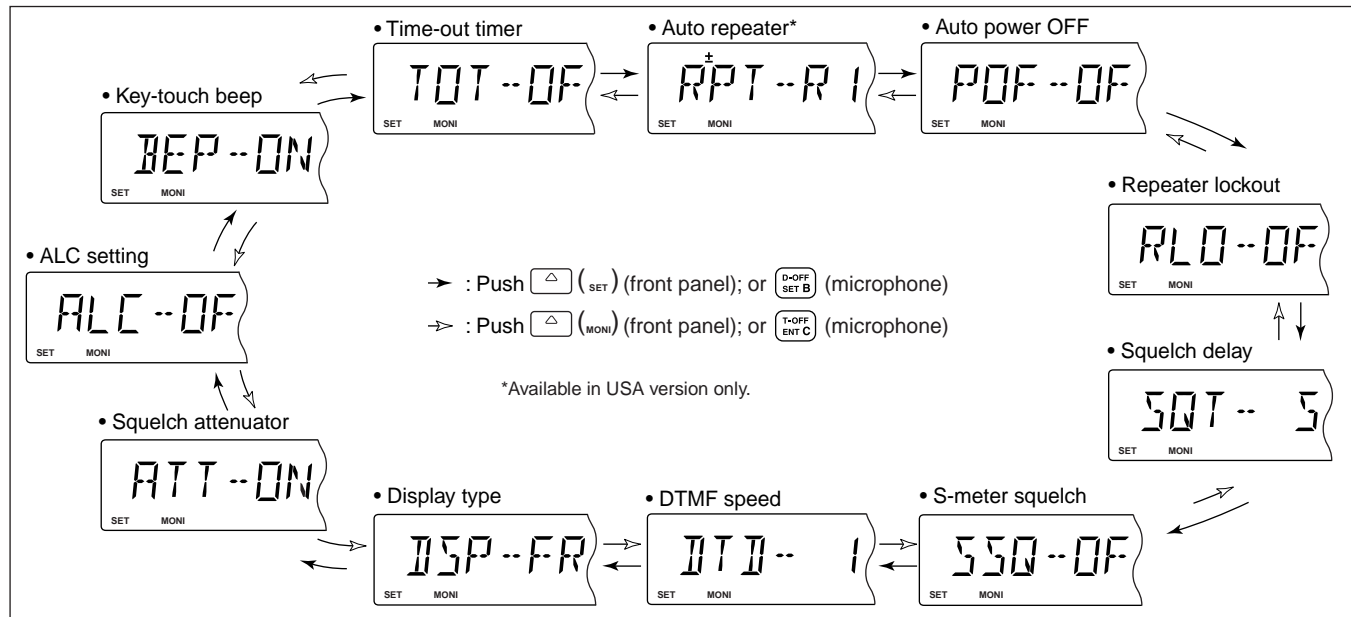

### ◆ Key-touch beep



The key-touch beep can be turned OFF for silent operation. (default: ON)



### ◆ Time-out timer

To prevent accidental prolonged transmission, etc., the transceiver has a time-out timer. This function cuts a transmission OFF after 1–30 min. of continuous transmission. This timer can be cancelled.

- TOT-OFF : The time-out timer is turned OFF. (default)
- TOT-1-30 : The transmission is cut OFF after the set period elapses.




### ◆ Auto repeater

U.S.A. version only

The auto repeater function automatically turns ON or OFF the duplex operation with a specified shift direction and tone encoder, when the operating frequency falls within or outside of 145.200–145.495 MHz, 146.610–146.995 MHz and 147.000–147.395 MHz range. The offset and repeater tone frequencies are not changed by the auto repeater function, reset these frequencies, if necessary.

- OF : The auto repeater function is turned OFF.
- R1 : Activates for duplex only. (default)
- R2 : Activates for duplex and tone.





## 13 OTHER FUNCTIONS

### ◆ Auto power OFF

The transceiver can be set to automatically turn OFF after a specified period with a beep when no key operations are performed.


30 min., 1 hour, 2 hours and OFF (default) can be specified. The specified period is retained even when the transceiver is turned OFF by the auto power OFF function. To cancel the function, select "OF" in this set mode.




### ◆ Repeater lockout

Selects lockout type from repeater, busy and OFF.

- OF : No lockout is activated (default)
- RP : The repeater lockout is turned ON
- BU : The busy lockout is turned ON



Busy lock-out setting




Repeater lock-out setting


### ◆ Squelch delay

Selects squelch delay from short and long to prevent repeated opening and closing of the squelch during reception of the same signal.

- S : Short squelch delay (default)
- L : Long squelch delay



Short squelch delay setting



Long squelch delay setting


### ◆ S-meter squelch

Selects S-meter squelch threshold level from OFF and S1–S7.

This setting allows you to set a minimum signal level needs to open the squelch.



S-meter squelch OFF (default)




S2 level (2 indicator level)

### ◇ DTMF speed

The rate at which DTMF memories send individual DTMF characters can be set to accommodate operating needs.


- 1 : 100 msec. interval; 5.0 cps speed (default)
- 2 : 200 msec. interval; 2.5 cps speed
- 3 : 300 msec. interval; 1.6 cps speed
- 5 : 500 msec. interval; 1.0 cps speed




### ◇ Display type

Selects LCD indication type from frequency, channel number and channel names.

- FR : Shows frequency (default)
  - CH : Shows channel number\*
  - NM : Shows channel names
- \*Programmed memory channels only can be selected.



Frequency indication setting




Memory channel name indication setting

### ◇ Squelch attenuator

Turns the squelch attenuator function ON and OFF.


- ON : The squelch attenuator activates when [SQL] control is set between 12 o'clock and fully clockwise position. (default)
- OF : The squelch attenuator does not function.




### ◇ ALC function

Sets the ALC (Automatic Level Control) function ON and OFF (default).

The ALC function reduces the microphone gain automatically when the transmission audio is distorted.



ALC function OFF (default)




ALC function ON

## Weather channel operation

*U.S.A. versions only*

### Weather channel selection




- ① Push **[M/CALL P/RIO]** several times to select weather channel group.
- ② Rotate **[DIAL]** to select the desired weather channel.
- ③ Push **[M/CALL P/RIO]** to select memory mode, or push **[V/MHz SCAN]** to select VFO mode.

### Weather alert function

NOAA broadcast stations transmit weather alert tones before important weather announcements. When the weather alert function is turned ON, the selected weather channel is monitored each 5 sec. for the announcement. When the alert signal is detected, the "ALT." and the WX channel are displayed alternately and sounds a beep tone until the transceiver is operated. The previously selected (used) weather channel is checked periodically during standby or while scanning.

- ① Select the desired weather channel.
- ② Turn the weather alert function ON in set mode.
  - ➔ Push **[SET LOCK]** to enter set mode.
  - ➔ Push **[SET LOCK]** or **[S.MW MW]** to select the weather alert item, then rotate **[DIAL]** to set ON.
  - ➔ Push **[TONE T-SCAN]** to exit set mode.
- ③ Sets the desired stand-by condition.
  - Selects VFO, memory or call channel.
  - Scan or priority watch operation can also be selected.
- ④ When the alert is detected, a beep sounds and the following indication will be displayed.



Shows above indications alternately.

- ⑤ Turn the weather alert function OFF in set mode.

**NOTE:** While receiving a signal (on a frequency other than the weather alert ON frequency), the receiving signal or audio will be interrupted momentarily every 5 sec. (approx.) in case the alert function is turned ON. This symptom is caused by the WX alert function. To cancel these symptoms, set the weather alert item OFF in set mode.



## ■ Microphone keys


The supplied HM-133V's (optional for some versions) [F-1] and [F-2] keys memorize the transceiver conditions.

The [UP]/[DN] keys of the standard or an optional microphone (other than the HM-133V) can be assigned functions like the function keys on the transceiver's front panel.

### ◇ [F-1]/[F-2] keys on HM-133V

The following conditions can be memorized into [F-1] and [F-2] keys, independently.

- Operating frequency
- Repeater setting (offset direction and frequency, tone ON/OFF and frequency)
- Tone/DTCS squelch (ON/OFF, frequency/code and polarity)
- Transmit output power selection
- Set mode settings
- Initial set mode settings (except display type item)



#### ➤ **Programming the condition**

Set the desired contents of each condition, then push [F-1]/[F-2] for 1 sec.  
 • 3 beeps sound.

#### ➤ **Re-calling the condition**

Push [F-1]/[F-2] momentarily.

### ◇ [UP]/[DN] keys on a microphones

(other than HM-133V)

AT POWER ON

The following functions are assigned to the [UP]/[DN] keys on the other microphones (HM-118N/TAN, etc.) when first applying power.

[UP] : channel up; push and hold to start scan, push again to stop scan.

[DN] : channel down; push and hold to start scan, push again to stop scan.

#### ➤ **Assigning a function**

- ① Turn the power OFF.
- ② While pushing the desired key on the transceiver and one of either [UP]/[DN] keys on the microphone, turn the power ON.
  - The function is programmed into the key.

#### ➤ **Clearing an assignment**

- ① Turn the power OFF.
- ② While pushing the desired [UP] or [DN] key on the microphone, turn the power ON.


## 13 OTHER FUNCTIONS

### ■ Partial reset

AT POWER ON

If you want to initialize the operating conditions (VFO frequency, VFO settings, set mode contents) without clearing the memory contents, a partial resetting function is available for the transceiver.

- ➔ Turn power OFF, if transceiver is powered ON.
- ➔ While pushing [**V/MHz** **SCAN**], turn the power ON to partially reset the transceiver.

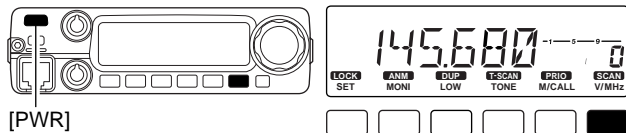

### ■ All reset

AT POWER ON

The function display may occasionally display erroneous information (e.g. when first applying power). This may be caused externally by static electricity or by other factors.


If this problem occurs, turn power OFF. After waiting a few seconds, turn power ON again. If the problem persists, perform the following procedure.

- Partial resetting is also available. See left for details.

#### /// IMPORTANT!:

Resetting the transceiver **CLEARs** all memory information and initializes all values in the transceiver.

- ➔ While pushing [**SET** **LOCK**] and [**S.MW** **MW**], turn the power ON to reset the CPU.

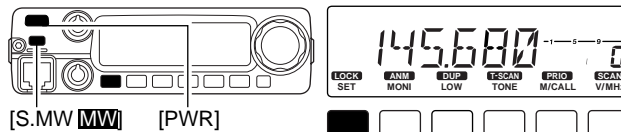


## ■ Data cloning


Cloning allows you to quickly and easily transfer the programmed contents from one transceiver to another; or, data from a personal computer to a transceiver using the optional CS-2200H CLONING SOFTWARE.


### ◇ Cloning between transceivers

- 1 Connect the OPC-474 cloning cable to the [SP] jack of the master and sub-transceivers.
  - The master transceiver is used to send data to the sub-transceiver.

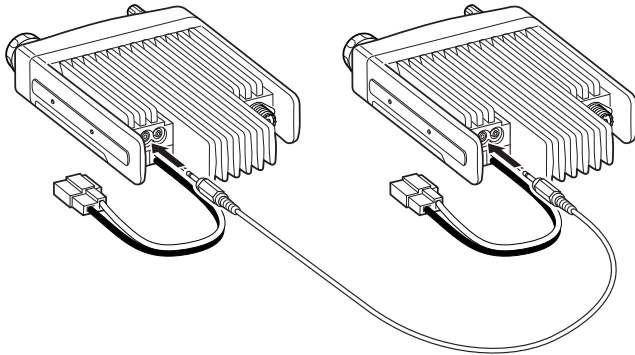


AT POWER ON





While pushing  (**ERIC M/CALL**), turn power ON.



- 2 While pushing **[M/CALL Prio]**, turn power ON to enter cloning mode (master transceiver only—power on only for sub-transceiver).
  - “CLONE” appears and the transceivers enter the clone standby condition.



Push  to start cloning (master transceiver).




- 3 Push **[S.MW MW]** on the master transceiver.
  - “CL OUT” appears in the master transceiver’s display and the S/RF indicator shows that data is being transferred to the sub-transceiver.
  - “CL IN” appears automatically in the sub-transceiver’s display and the S/RF indicator shows that data is being received from the master transceiver.

- 4 When cloning is finished, turn power OFF, then ON to exit cloning mode.

## 13 OTHER FUNCTIONS


### ◇ Cloning using a personal computer

Data can be cloned to and from a personal computer (Microsoft® Windows® 98/98SE/2000/Me/XP) using the optional CS-2200H CLONING SOFTWARE and the optional OPC-478 (RS-232C type) or OPC-478U (USB type) CLONING CABLE. Consult the CS-2200H CLONING SOFTWARE HELP file for details.

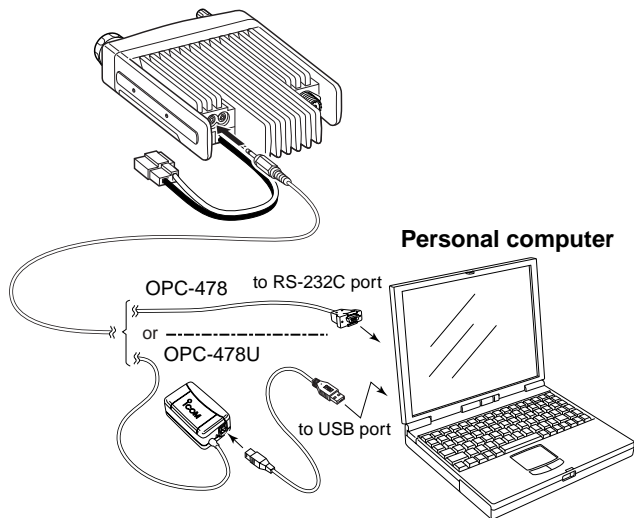

### ◇ Cloning error

**NOTE: DO NOT** push any key on the sub-transceiver during cloning. This will cause a cloning error.



When the display at left appears, a cloning error has occurred.

In such a case, both transceivers automatically return to the clone standby condition and cloning must be repeated.

Microsoft and Windows are registered trademarks of Microsoft Corporation in the U.S.A. and other countries.

## GENERAL

- Frequency coverage : (unit: MHz)
  - USA, Asia, Australia Tx: 144–148/Rx: 118–174\*
  - Europe Tx: 144–146/Rx: 118–174\*
  - Europe-1, Taiwan, Korea Tx/Rx: 144–146
- \*Guaranteed: 144–148 MHz range only.
- Type of emission : FM, AM (Receive only)
- Number of memory channels : 207 (incl. 6 scan edges and 1 call)
- Frequency resolution : 5, 10, 12.5, 15, 20, 25, 30, 50 kHz
- Operating temperature range : –10°C to +60°C; +14°F to +140°F
- Frequency stability : ±10 ppm (–10°C to +60°C)
- Power supply requirement : 13.8 V DC ±15%
- Current drain (at 13.8 V DC: approx.):
  - Transmit at 65 W 15 A
  - Receive standby 0.8 A
  - max. audio 1.0 A
- Antenna connector : SO-239 (50 Ω)
- Dimensions (proj. not included) : 140(W) × 40(H) × 146(D) mm  
5½(W) × 1⅞(H) × 5¾(D) in
- Weight (approx.) : 1.25 kg; 2 lb 12 oz

## TRANSMITTER

- Modulation system : Variable reactance frequency mod.
- Output power :
  - (\*approx., \*Korea version)

Power Selection	Power output	
		Taiwan
High	65 W (50 W†)	24 W
Middle	25 W*	10 W*
Mid. low	10 W*	N/A
Low	5 W*	5 W*

- Max. frequency deviation : ±5.0 kHz [Wide]/±2.5 kHz [Narrow]†
- Spurious emissions : Less than –60 dBc
- Microphone connector : 8-pin modular (600 Ω)

## RECEIVER

- Receive system : Double-conversion superheterodyne
- Intermediate frequencies : 1st: 21.7 MHz, 2nd: 450 kHz
- Sensitivity (at 12 dB SINAD) : 0.14 μV typical
- Squelch sensitivity (threshold) : 0.1 μV typical
- Selectivity :
  - [Wide] More than ±6 kHz/6 dB  
Less than ±14 kHz/60 dB
  - [Narrow]† More than ±3 kHz/6 dB  
Less than ±9 kHz/55 dB
- Spurious and image rejection : 75 dB typical
- AF output power (at 13.8 V DC) : More than 2.4 W at 10% distortion with an 8 Ω load
- Ext. speaker connector : 3-conductor 3.5 (d) mm (⅛")/8 Ω
- Ext. Data connector : 3-conductor 2.5 (d) mm (1/10")

†Some version only

All stated specifications are subject to change without notice or obligation.

# 15 MAINTENANCE

## ■ Troubleshooting


If your transceiver seems to be malfunctioning, please check the following points before sending it to a service center.

PROBLEM	POSSIBLE CAUSE	SOLUTION	REF.
No power comes on.	<ul style="list-style-type: none"> <li>Power connector has a poor contact.</li> <li>Polarity of the power connection is reversed.</li> <li>Blown fuse.</li> </ul>	<ul style="list-style-type: none"> <li>Check the connector pins.</li> <li>Re-connect the power cable observing the proper polarity. Replace the fuse if damaged.</li> <li>Check the cause, then replace the fuse.</li> </ul>	— pgs. II, 90 p. 90
No sound comes from the speaker.	<ul style="list-style-type: none"> <li>Volume is too low.</li> <li>The audio mute function is activated.</li> <li>Squelch is set too tight.</li> <li>A selective call or squelch function is activated such as pocket beep or tone squelch.</li> </ul>	<ul style="list-style-type: none"> <li>Rotate <b>[VOL]</b> clockwise.</li> <li>Push any switch or key to deactivate it.</li> <li>Set the squelch level to the threshold.</li> <li>Turn the appropriate function OFF.</li> </ul>	p. 13 p. 14 p. 13 pgs. 48, 49, 50
Sensitivity is low and only strong signals are audible.	<ul style="list-style-type: none"> <li>Antenna feedline or the antenna connector solder has a poor contact or is short circuited.</li> <li>Squelch attenuator function is activated.</li> </ul>	<ul style="list-style-type: none"> <li>Check, and if necessary, replace the feedline or solder the antenna connector again.</li> <li>Set <b>[SQL]</b> between 10–12 o'clock position.</li> </ul>	p. III p. 14
No contact possible with another station.	<ul style="list-style-type: none"> <li>The other station is using tone squelch.</li> <li>The transceiver is set to duplex.</li> </ul>	<ul style="list-style-type: none"> <li>Turn the tone squelch function ON.</li> <li>Set to simplex.</li> </ul>	p. 50 p. 17
Repeater cannot be accessed.	<ul style="list-style-type: none"> <li>Wrong offset frequency is programmed.</li> <li>Wrong subaudible tone frequency is programmed.</li> </ul>	<ul style="list-style-type: none"> <li>Correct the offset frequency.</li> <li>Correct the subaudible tone frequency.</li> </ul>	p. 21 p. 19
Frequency cannot be set.	<ul style="list-style-type: none"> <li>The frequency lock function is activated.</li> <li>Priority watch is paused on the watching frequency.</li> </ul>	<ul style="list-style-type: none"> <li>Turn the function OFF.</li> <li>Push <b>[M/CALL PRIO]</b> to cancel the watch.</li> </ul>	p. 12 p. 44
Frequency cannot be set via the microphone.	<ul style="list-style-type: none"> <li>The frequency lock function is activated.</li> <li>The microphone keypad lock function is activated.</li> <li>Priority watch is paused on the watching frequency.</li> </ul>	<ul style="list-style-type: none"> <li>Push <b>[SET LOCK]</b> for 1 sec. to deactivate the frequency lock function.</li> <li>Push <b>[FUNC]</b> then <b>#[16KEY-L]</b> to deactivate the microphone keypad lock function.</li> <li>Push <b>[M/CALL PRIO]</b> to cancel the watch.</li> </ul>	p. 12 p. 12 p. 44

PROBLEM	POSSIBLE CAUSE	SOLUTION	REF.
Some memory channels cannot be selected via the microphone keypad.	<ul style="list-style-type: none"> <li>The input channel number has not yet been programmed.</li> </ul>	<ul style="list-style-type: none"> <li>Rotate <b>[DIAL]</b> to check whether the channel has been programmed or not.</li> </ul>	—
Scan does not operate.	<ul style="list-style-type: none"> <li>The squelch is open.</li> <li>Only 1 memory channel is programmed or other channels are set as skip channels.</li> <li>Priority watch is activated.</li> </ul>	<ul style="list-style-type: none"> <li>Set the squelch to the threshold point.</li> <li>Program other memory channels or cancel the memory skip function in the desired channels.</li> <li>Cancel the watch.</li> </ul>	p. 13 pgs. 25, 26, 41 p. 44
Transmission is automatically cut off.	<ul style="list-style-type: none"> <li>Time-out timer is activated.</li> </ul>	<ul style="list-style-type: none"> <li>Set the timer to OFF.</li> </ul>	p. 80
Transmission continues even when the PTT is released.	<ul style="list-style-type: none"> <li>One-touch PTT function is activated.</li> </ul>	<ul style="list-style-type: none"> <li>Turn the function OFF.</li> </ul>	p. 16
The function display shows erroneous information.	<ul style="list-style-type: none"> <li>The CPU is malfunctioning.</li> </ul>	<ul style="list-style-type: none"> <li>Reset the CPU.</li> </ul>	p. 85


## ■ Fuse replacement

If the fuse blows or the transceiver stops functioning, find the source of the problem if possible, and replace the damaged fuse with a new, rated one (FGB 20 A) as shown at right.

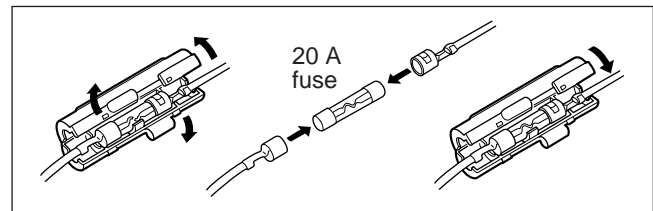


## ■ Optional unit installation

- ① Remove [DIAL] and unscrew the 2 allen-socket bolts from the front panel using with an allen wrench (2.5 mm; 1/10")

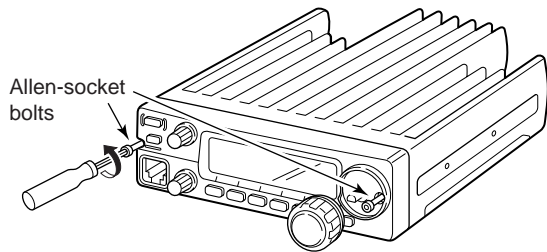


- ② Detach the front panel from the main unit.

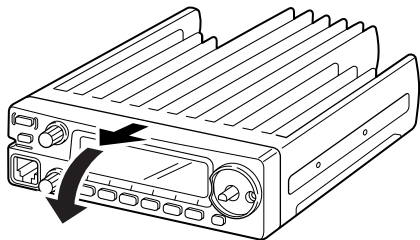

- ③ Attach the insulation sheet (supplied as accessory) to IC on the Front unit.  
④ Remove the protective paper attached to the bottom of the optional unit to expose the adhesive strip.

- ⑤ Install the unit as illustrated below. Insert tightly to avoid bad contact.

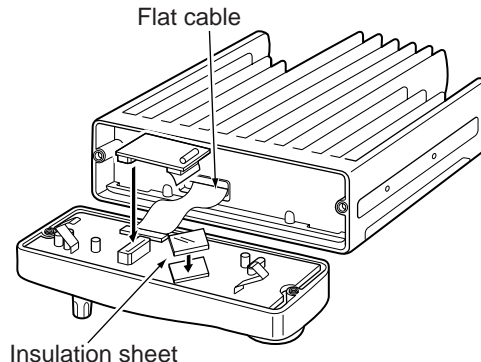

- ⑥ Return the front panel and the allen-socket bolts to their original position.

**NOTE:** When attaching the front panel to the main unit, make sure the flat cable are running in the groove to prevent catching between front panel and main unit.





We Icom Inc. Japan

1-1-32, Kamiminami, Hirano-ku  
Osaka 547-0003, Japan

Declare on our sole responsibility that this equipment complies with the essential requirements of the Radio and Telecommunications Terminal Equipment Directive, 1999/5/EC, and that any applicable Essential Test Suite measurements have been performed.

**Kind of equipment:** FM TRANSCEIVER

**Type-designation:** IC-2200H

**Version (where applicable):** \_\_\_\_\_

This compliance is based on conformity with the following harmonised standards, specifications or documents:

- i) EN 301 489-1 v 1.3.1 (2001-09)
- ii) EN 301 489-15 v 1.1.1 (2000-09)
- iii) EN 301 783 v 1.1.1 (2000-09)
- iv) EN 60950 (1992-08) + A11:1997

## DECLARATION OF CONFORMITY



Düsseldorf 8th Dec. 2003  
Place and date of issue


Icom (Europe) GmbH  
Himmelgeister straÙe 100  
D-40225 Düsseldorf

Authorized representative name  
T. Maebayashi  
General Manager

Signature

**Icom Inc.**

# 17 MODE ARRANGEMENT


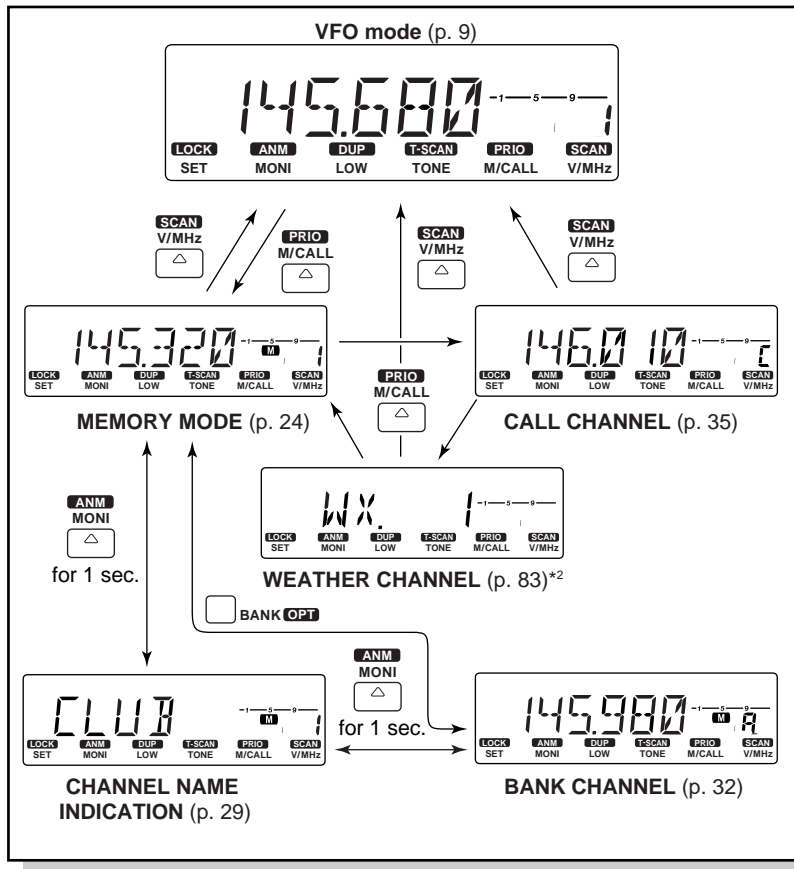


LOCK SET  
△

T-SCAN TONE  
△

BANK OPT

When the DTMF memory encoder is activated.



\*1 Appears when accessing from memory mode only.

\*2 Available for USA versions only.

\*3 Appears in some version only.

SET MODE

**SET MODE**

DIM-- 4 Display dimmer (p. 75)	SCT-- 15 Scan resume timer (p. 76)
COL-- AM Display color (p. 75)	TX --ON Transmit permission (p. 76)
RT Repeater tone (p. 75)	CHS--OF Skip setting*1 (p. 77)
ST Tone squelch tone (p. 75)	BAK - - - - Memory bank selection*1 (p. 77)
DTCS DTCS code (p. 75)	BLK--OF Bank link function*1 (p. 77)
DTP-- NN DTCS polarity (p. 75)	BLA--OF Bank link setting*1 (p. 77)
OF Offset frequency (p. 76)	W/N-- W Wide/Nar. selection*3 (p. 78)
REV--OF Reverse mode (p. 76)	A/F--FM AM/FM mode select (p. 78)
TS -- 5 Tuning step (p. 76)	ALT--OF Weather alert*2 (p. 78)

Navigation: SET (up), MONI (down)

INITIAL SET MODE

Turn power ON while pushing (LOCK SET).

**INITIAL SET MODE**

BEP--ON Beep tone on/off (p. 80)	SSQ--OF S-meter squelch (p. 81)
TOT--OF Time-out timer (p. 80)	DTMF-- 1 DTMF speed (p. 82)
RPT--R 1 Auto repeater*2 (p. 80)	DSP--FR Display type (p. 82)
PDF--OF Auto power-off (p. 81)	ATT--ON Squelch attenuator (p. 82)
RLO--OF Repeater lockout (p. 81)	ALC--OF ALC function (p. 82)
SQT-- 5 Squelch delay (p. 81)	

Navigation: SET (up), MONI (down)

**Count on us!**

#02 Europe  
#12 Europe-1

<Intended Country of Use>			
<input checked="" type="checkbox"/> GER	<input checked="" type="checkbox"/> FRA	<input checked="" type="checkbox"/> ESP	<input checked="" type="checkbox"/> SWE
<input checked="" type="checkbox"/> AUT	<input checked="" type="checkbox"/> NED	<input checked="" type="checkbox"/> POR	<input type="checkbox"/> DEN
<input checked="" type="checkbox"/> GBR	<input type="checkbox"/> BEL	<input checked="" type="checkbox"/> ITA	<input checked="" type="checkbox"/> FIN
<input checked="" type="checkbox"/> IRL	<input checked="" type="checkbox"/> LUX	<input type="checkbox"/> GRE	<input type="checkbox"/> SUI
<input checked="" type="checkbox"/> NOR			